



MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

Description

The MPCS-314 series Photocoupler is ideally suited for driving power IGBTs and MOSFETs used in motor control inverter applications and inverters in power supply system. It contains an LED optically coupled to an integrated circuit with a power output stage. The 1.0A peak output current is capable of directly driving most IGBTs with ratings up to 1200 V/50 A. For IGBTs with higher ratings, the MPCS-314 series can be used to drive a discrete power stage which drives the IGBT gate.


Features

- 1.0 A maximum peak output current
- Rail-to-rail output voltage
- 110 ns maximum propagation delay
- Under Voltage Lock-Out protection (UVLO) with hysteresis
- Wide operating range: 10 to 30 Volts (V_{CC})
- Guaranteed performance over temperature - $40^{\circ}\text{C} \sim +110^{\circ}\text{C}$.
- Regulatory Approvals
 - UL - UL1577
 - VDE - EN60747-5-5(VDE0884-5)
 - CQC - GB4943.1, GB8898

Applications

- Isolated IGBT/Power MOSFET gate drive
- Industrial Inverter
- AC brushless and DC motor drives
- Induction Heating


SCHEMATIC

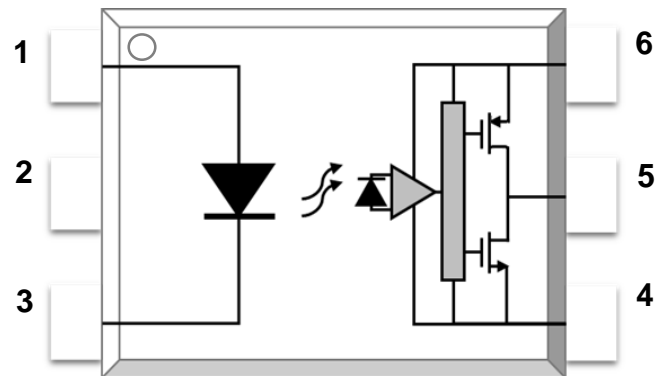

PIN DEFINITION

1. Anode	6. V_{CC}
2. NC	5. V_O
3. Cathode	4. GND

PACKAGE OUTLINE

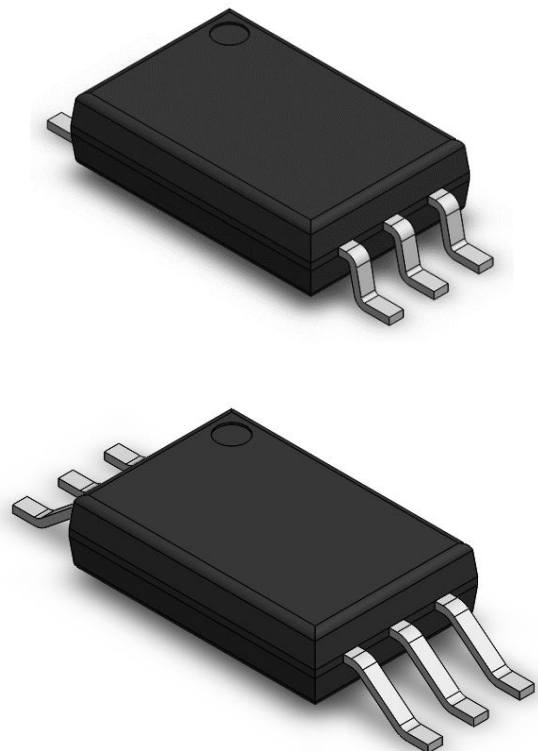



MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

TRUTH TABLE

LED	$V_{CC}-V_{SS}$ (Turn-ON, +ve going)	$V_{CC}-V_{SS}$ (Turn-OFF, -ve going)	VO
Off	0V to 30V	0V to 30V	Low
On	0V to 6.9V	0V to 5.9V	Low
On	6.9V to 8.7V	5.9V to 7.5V	Transition
On	8.7V to 30V	7.5V to 30V	High

Note: A 0.1 μ F bypass capacitor must be connected between Pin 4 and 6.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	NOTE
Storage Temperature	T_{stg}	-55	125	$^{\circ}$ C	-
Operating Temperature	T_{opr}	-40	110	$^{\circ}$ C	-
Output IC Junction Temperature	T_J	-	125	$^{\circ}$ C	-
Total Output Supply Voltage	$(V_{CC}-V_{SS})$	0	35	V	-
Average Forward Input Current	I_F	-	20	mA	-
Reverse Input Voltage	V_R	-	5	V	-
“High” Peak Output Current	$I_{OH(PEAK)}$	-	1.0	A	1
“Low” Peak Output Current	$I_{OL(PEAK)}$	-	1.0	A	1
Output Voltage	$V_{O(PEAK)}$	-0.5	V_{CC}	V	-
Power Dissipation	P_I	-	45	mW	-
Output IC Power Dissipation	P_O	-	250	mW	-
Lead Solder Temperature	T_{sol}	-	260	$^{\circ}$ C	-

Note: Ambient temperature = 25 $^{\circ}$ C, unless otherwise specified. Stresses exceeding the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for long periods of time can adversely affect reliability.

Note 1: Exponential waveform. Pulse width \leq 10 μ s, $f \leq$ 15 kHz

RECOMMENDED OPERATION CONDITIONS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Operating Temperature	T_A	-40	110	$^{\circ}$ C
Supply Voltage	V_{CC}	10	30	V
Input Current (ON)	$I_{F(ON)}$	5	16	mA
Input Voltage (OFF)	$V_{F(OFF)}$	-3.0	0.8	V



MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

ELECTRICAL OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT CHARACTERISTICS							
Forward Voltage	V_F	1.6	1.9	2.4	V	$I_F = 10\text{ mA}$	-
Input Forward Voltage Temperature Coefficient	$\Delta V_F / \Delta T$	-	-1.237	-	mV/°C	$I_F = 10\text{ mA}$	-
Input Reverse Voltage	BV_R	5	-	-	V	$I_R = 10\text{ }\mu\text{A}$	-
Input Threshold Current (Low to High)	I_{FLH}	-	0.6	2	mA	$V_O > 5\text{ V}, I_O = 0\text{ A}$	-
Input Threshold Voltage (High to Low)	V_{FHL}	0.8	-	-	V	$V_{CC} = 30\text{ V}, V_O < 5\text{ V}$	-
Input Capacitance	C_{IN}	-	60	-	pF	$V_F = 0, f = 1\text{ MHz}$	-
OUTPUT CHARACTERISTICS							
High Level Supply Current	I_{CCH}	-	1.55	3	mA	$I_F = 10\text{ mA}, V_{CC} = 30\text{ V}, V_O = \text{Open}$	-
Low Level Supply Current	I_{CCL}	-	1.92	3	mA	$I_F = 0\text{ mA}, V_{CC} = 30\text{ V}, V_O = \text{Open}$	-
High Level Output Voltage	V_{OH}	29.4	29.69	-	V	$I_F = 10\text{ mA}, I_O = -100\text{ mA}$	1,2
Low Level Output Voltage	V_{OL}	-	0.17	0.4	V	$I_F = 0\text{ mA}, I_O = 100\text{ mA}$	-
High Level Output Current	I_{OH}	1.0	-	-	A	$I_F = 10\text{ mA}, V_{CC} = 30\text{ V}, V_O = V_{CC} - 4$	3
Low Level Output Current	I_{OL}	1.0	-	-	A	$I_F = 0\text{ mA}, V_{CC} = 30\text{ V}, V_O = V_{SS} + 4$	3
Under Voltage Lockout Threshold	V_{UVLO+}	6.9	7.8	8.7	V	$V_O > 5\text{ V}, I_F = 10\text{ mA}$	-
	V_{UVLO-}	5.9	6.9	7.5	V	$V_O < 5\text{ V}, I_F = 10\text{ mA}$	-

Note: All Typical values at $T_A = 25^\circ\text{C}$ and $V_{CC} - V_{SS} = 30\text{ V}$, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: In this test V_{OH} is measured with a dc load current. When driving capacitive loads, V_{OH} will approach V_{CC} as I_{OH} approaches zero amps.

Note 2: Maximum pulse width = 1 ms.

Note 3: Maximum pulse width = 10 μs .



MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

SWITCHING SPECIFICATION

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
SWITCHING CHARACTERISTICS							
Propagation Delay Time to Output Low Level	t_{PHL}	-	54	110	ns	$R_g = 47\ \Omega$, $C_g = 3\ nF$, $f = 10\ kHz$, Duty Cycle = 50% $I_F = 10\ mA$, $V_{CC} = 30\ V$	-
Propagation Delay Time to Output High Level	t_{PLH}	-	69	110	ns		-
Pulse Width Distortion	P_{WD}	-	22	70	ns		-
Propagation Delay Difference Between Any Two Parts	P_{DD} ($t_{PHL} - t_{PLH}$)	-100	-	+100	ns		-
Rise Time	t_r	-	10	-	ns		-
Fall Time	t_f	-	10	-	ns		-
Common Mode Transient Immunity at Logic High	CM_H	20	40	-	kV/ μs	$I_F = 7\ to\ 16\ mA$ $V_{CC} = 30\ V$, $T_A = 25\ ^\circ C$, $V_{CM} = 1\ kV$	1,2
Common Mode Transient Immunity at Logic Low	CM_L	20	40	-	kV/ μs	$I_F = 0\ mA$ $V_{CC} = 30\ V$, $T_A = 25\ ^\circ C$, $V_{CM} = 1\ kV$	1,3

Note: All Typical values at $T_A = 25^\circ C$ and $V_{CC} - V_{SS} = 30\ V$, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Pin 2 needs to be connected to LED common.

Note 2: Common mode transient immunity in the high state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in the high state (meaning $V_O > 10.0V$).

Note 3: Common mode transient immunity in a low state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in a low state (meaning $V_O < 1.0V$).



MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

ISOLATION CHARACTERISTIC

PARAMETER	SYMBOL	DEVICE	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
Withstand Insulation Test Voltage	V _{ISO}	MPCS-314P	5000	-	-	V	RH ≤ 40%-60%, t = 1min, T _A = 25 °C	1,2
		MPCS-314W						
Input-Output Resistance	R _{I-O}	-	-	10 ¹²	-	Ω	V _{I-O} = 500V DC	1

Note: All Typical values at T_A = 25°C and V_{CC} – V_{SS} = 30 V, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Device is considered a two terminal device: pins 1, 2, 3 are shorted together and pins 4, 5, 6 are shorted together.

Note 2: According to UL1577, each photocoupler is tested by applying an insulation test voltage 6000VRMS for one second. This test is performed before the 100% production test for partial discharge.



MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

TYPICAL PERFORMANCE CURVES & TEST CIRCUITS

Fig.1 High output rail voltage vs. Temperature

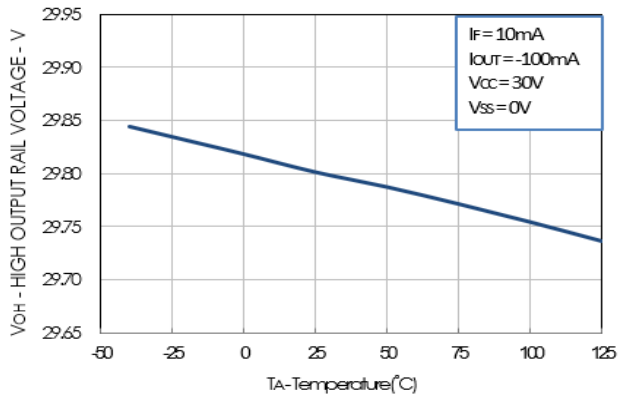


Fig.2 V_{OH} vs. Temperature

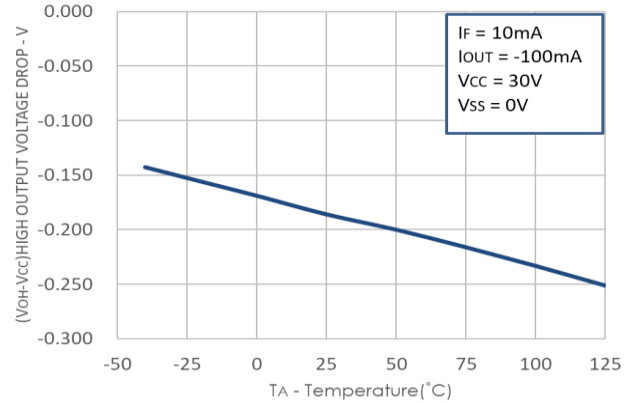


Fig.3 V_{OL} vs. Temperature

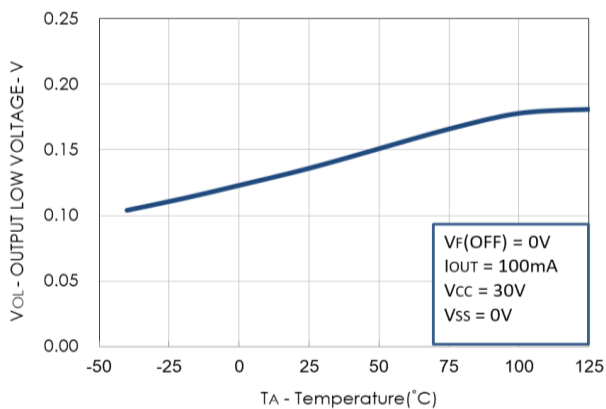


Fig.4 I_{CC} vs. Temperature

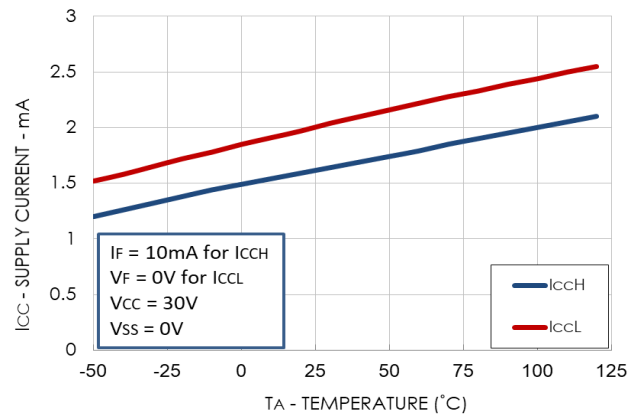


Fig.5 I_{CC} vs. V_{CC}


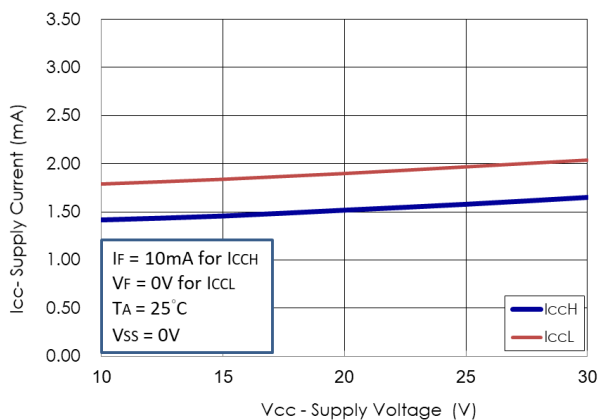


Fig.6 I_{FLH} vs. Hysteresis



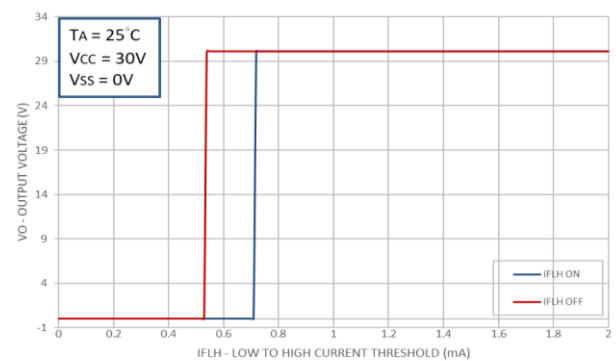

MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

Fig.7 I_{FH} vs. Temperature

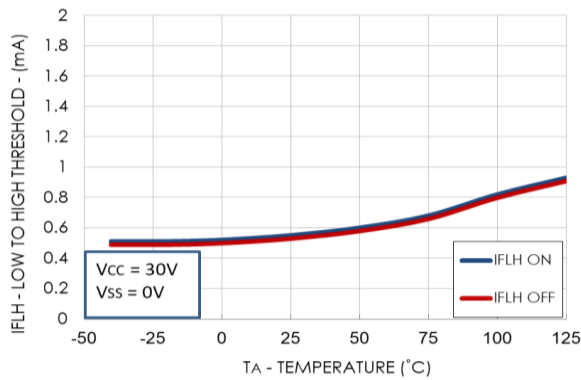


Fig.8 Propagation Delays vs. V_{CC}

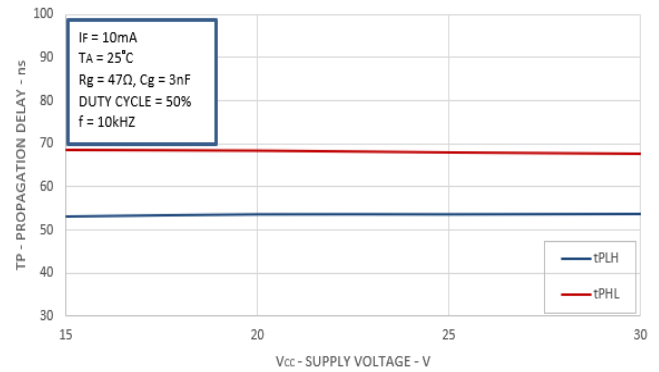


Fig.9 Propagation Delays vs. I_F

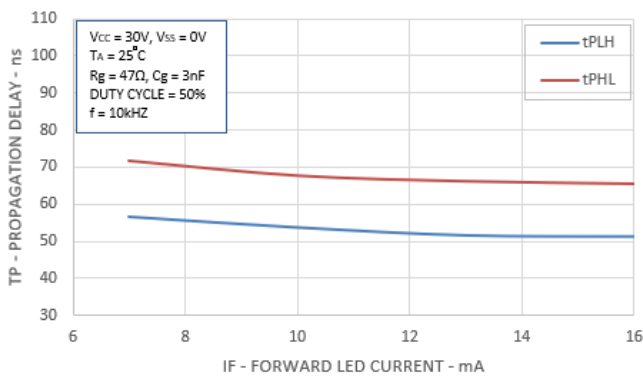


Fig.10 Propagation Delays vs. Temperature

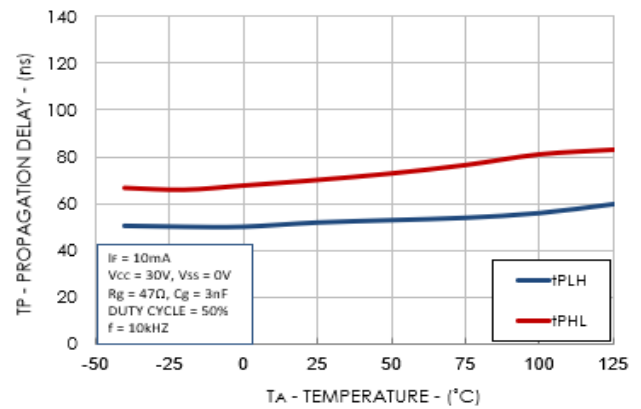


Fig.11 Propagation Delays vs. R_g

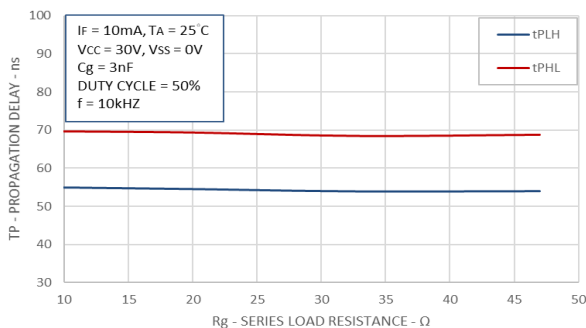


Fig.12 Propagation Delays vs. C_g

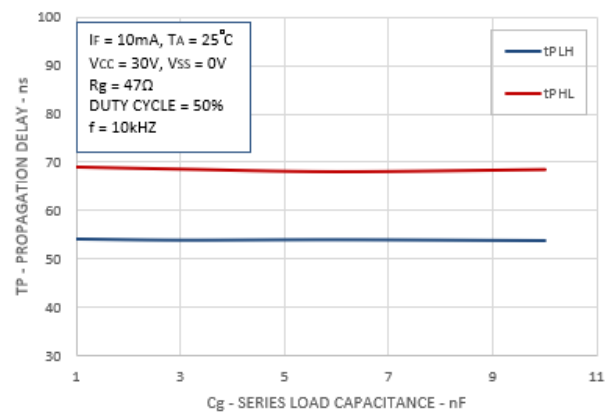


Fig.13 Input Current vs. Forward Voltage

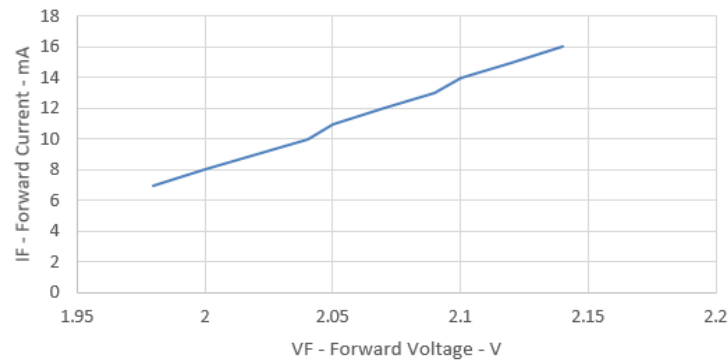


Fig.14 I_{OH} Test Circuit

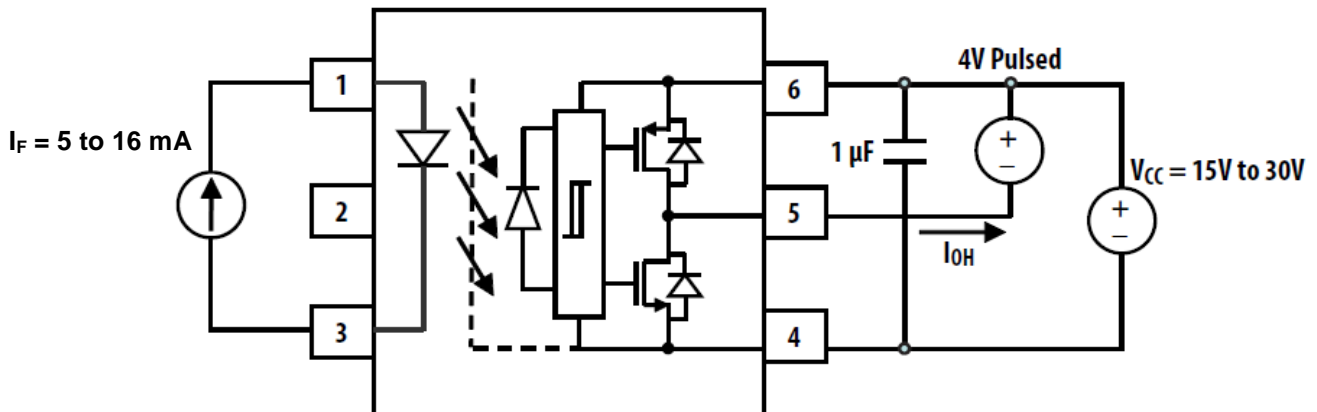


Fig.15 I_{OL} Test Circuit

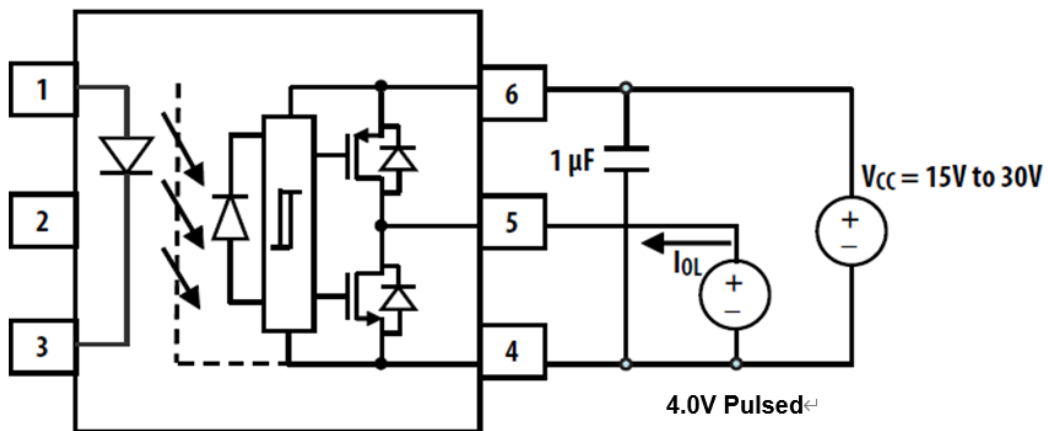


Fig.16 V_{OH} Test Circuit

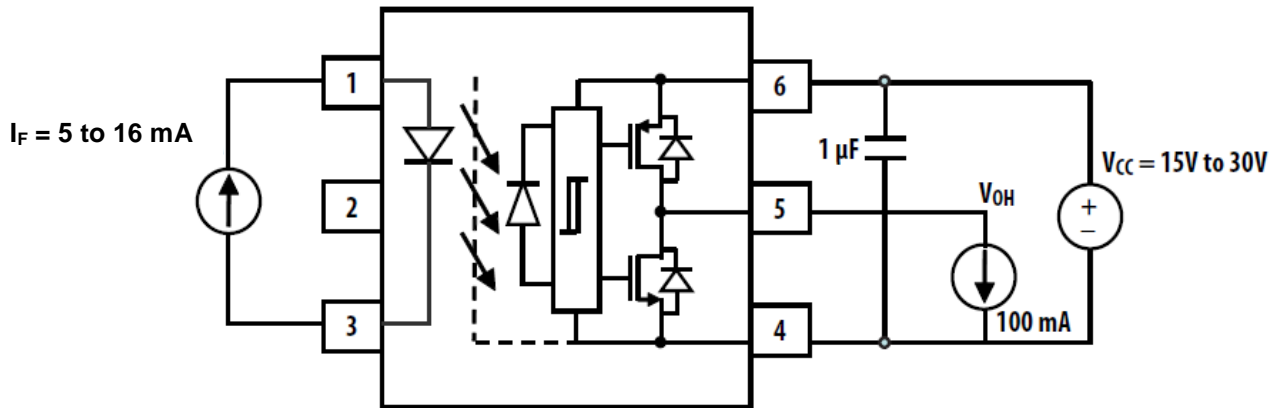


Fig.17 V_{OL} Test Circuit

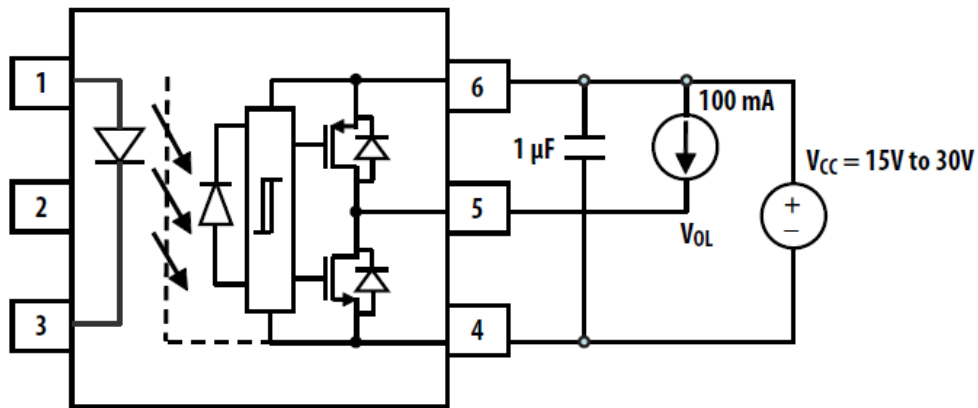


Fig.18 I_{FLH} Test Circuit

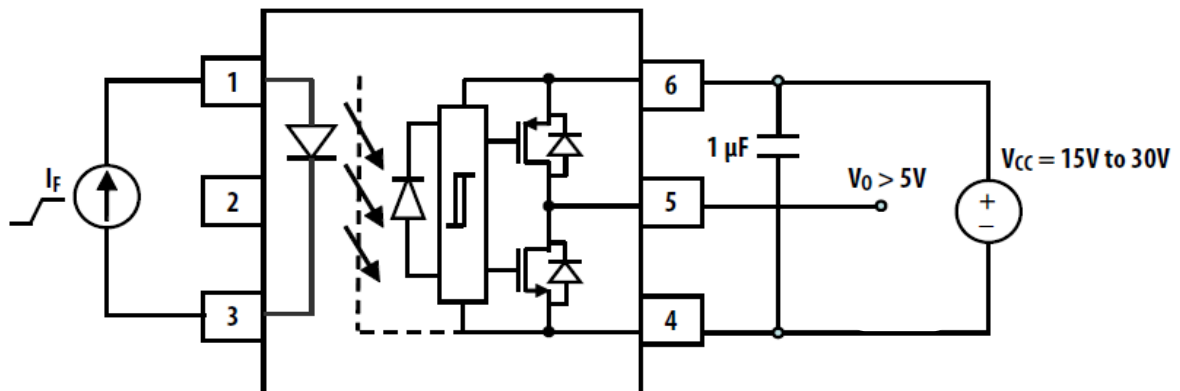


Fig.19 U_{VLO} Test Circuit

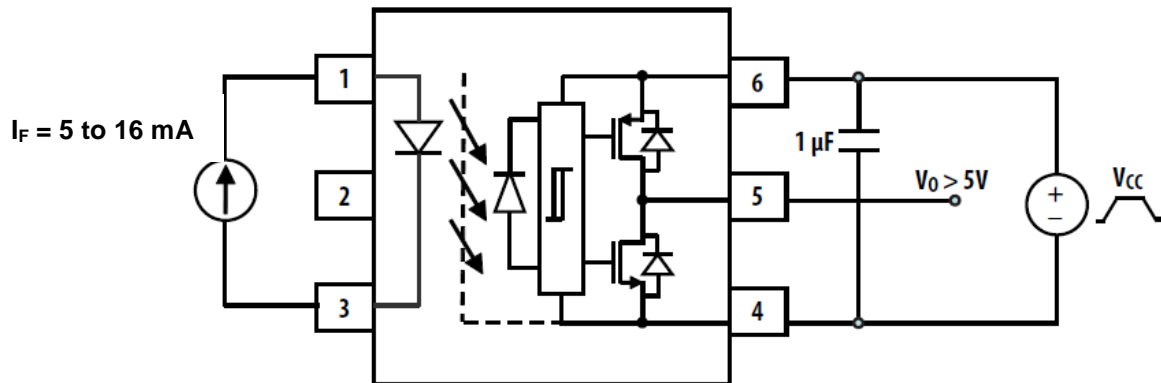


Fig.20 t_{PHL} , t_{PLH} , t_r and t_f Test Circuit and Waveforms


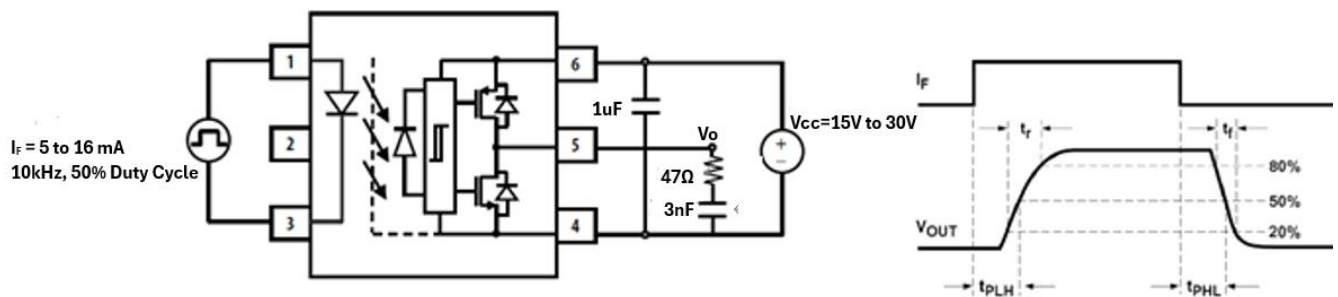


Fig.21 CMR Test Circuit with Split Resistors Network and Waveforms



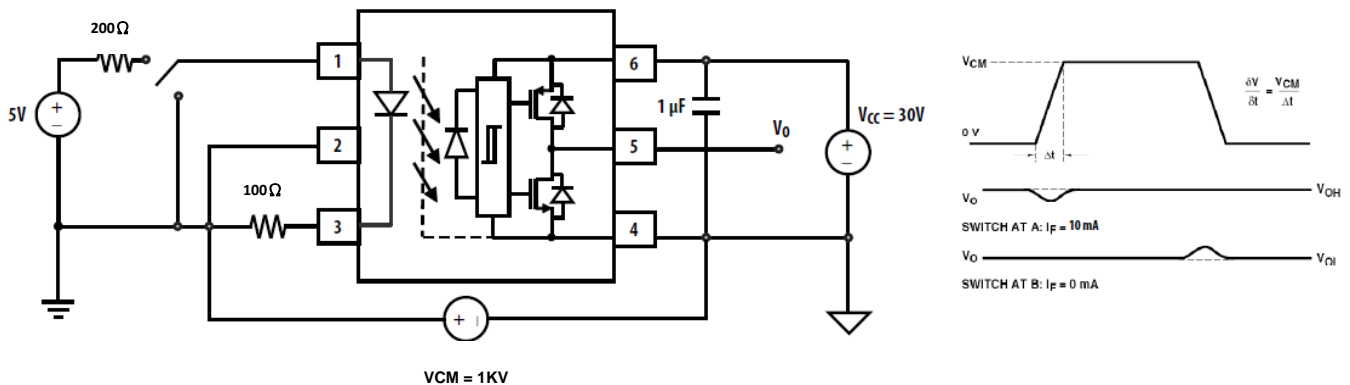


MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler


PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (P Type)

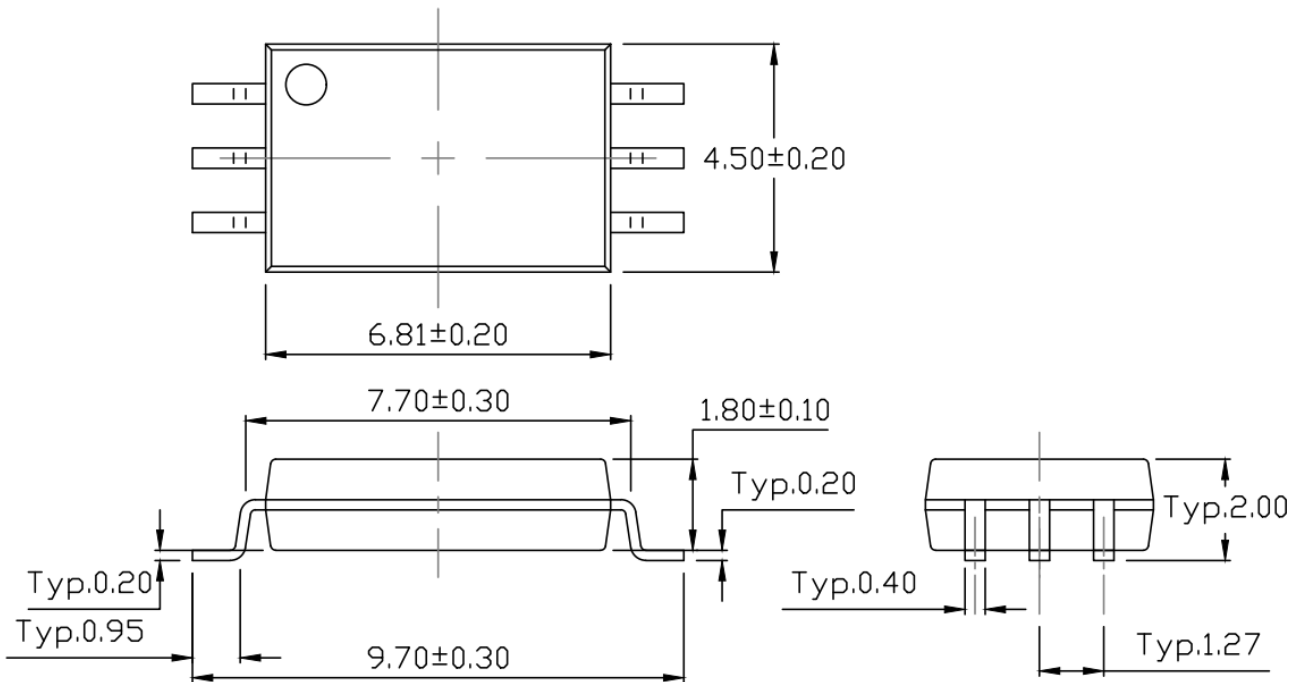

General Tolerance: ± 0.25 mm

Surface Mount (Gullwing) Lead Forming (W Type)

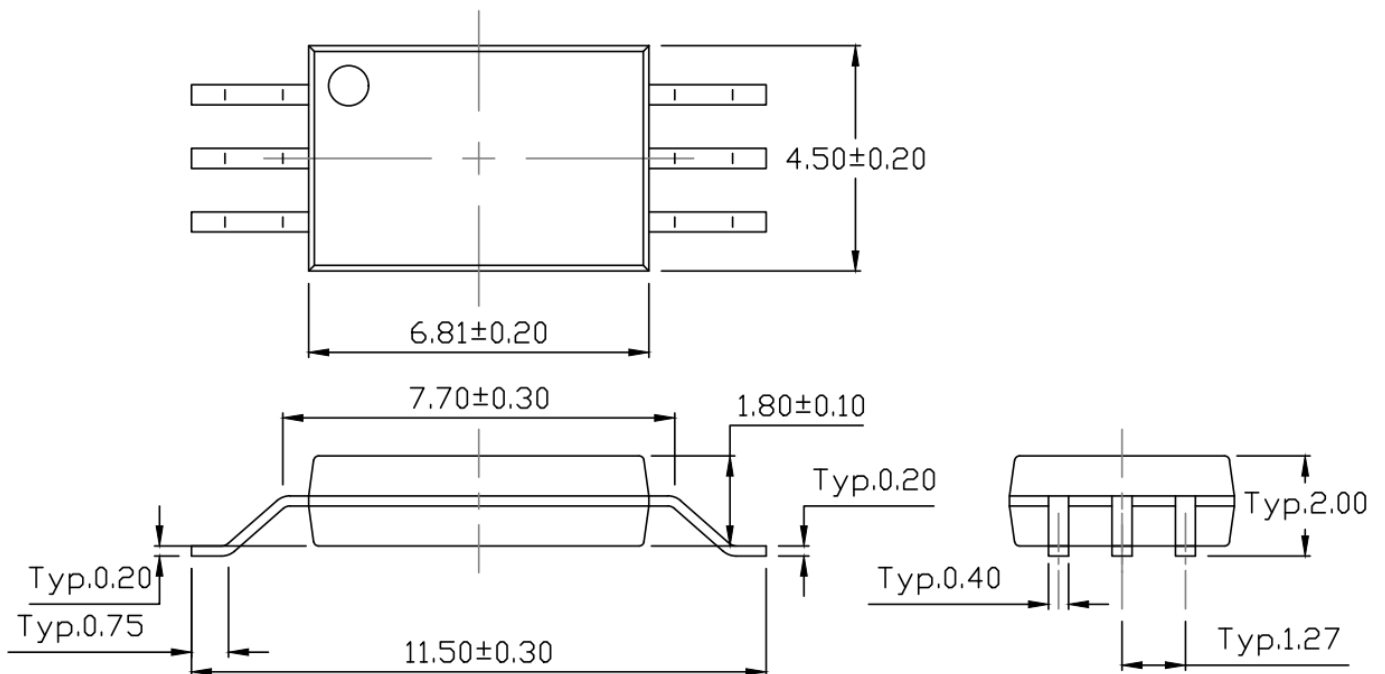

General Tolerance: ± 0.25 mm




MPCS-314 Series


LSOP6, DC Input, 1.0A Gate Driver Optocoupler

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (P Type)

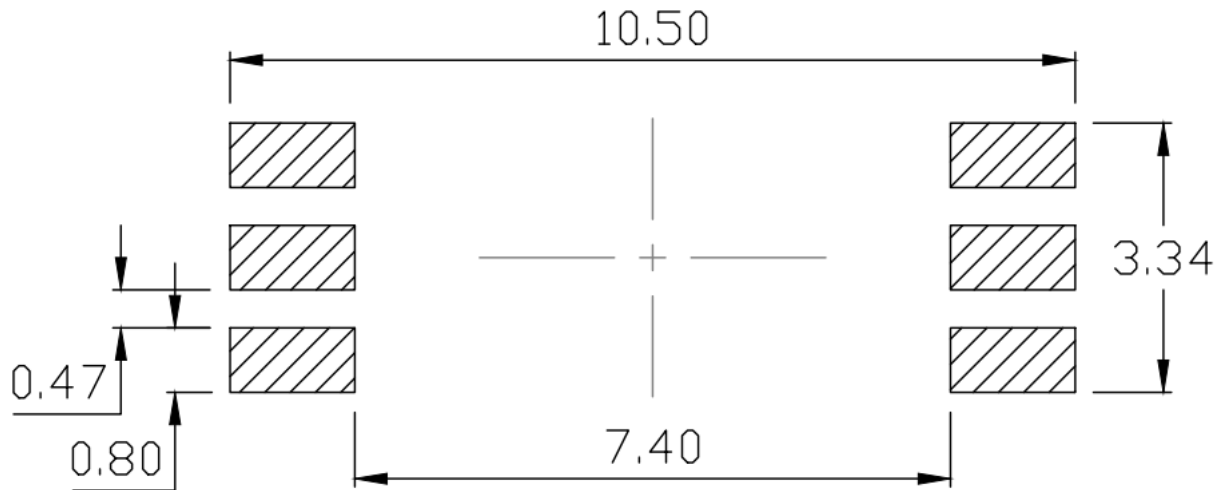

Surface Mount (Gullwing) Lead Forming (W Type)

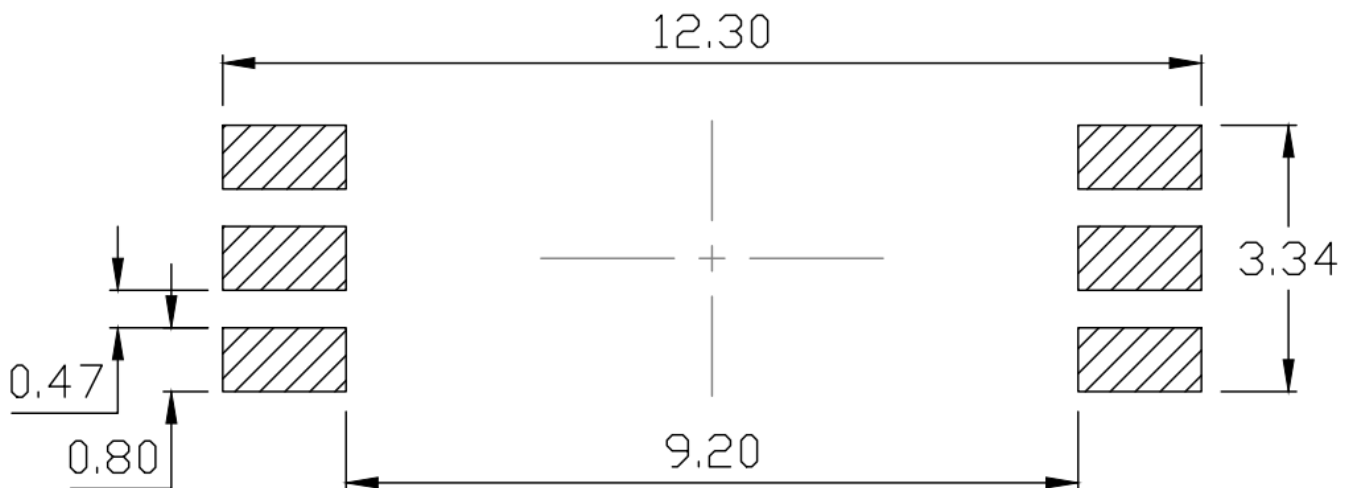




MPCS-314 Series


LSOP6, DC Input, 1.0A Gate Driver Optocoupler


CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (P Type) Option T1

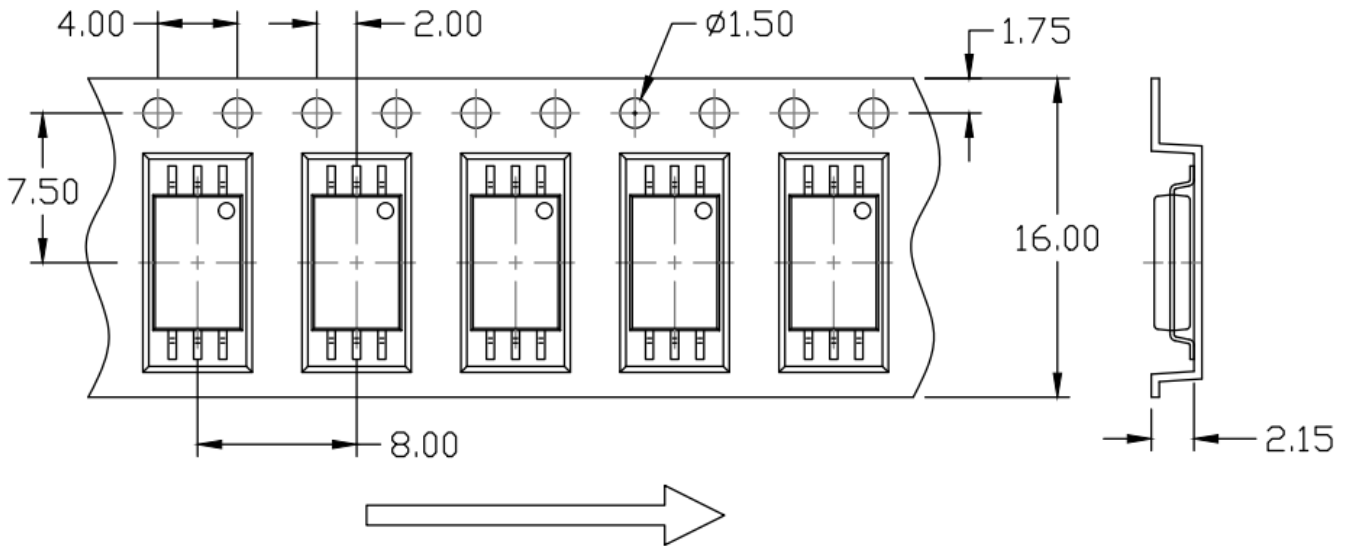

Surface Mount Lead Forming (P Type) Option T2

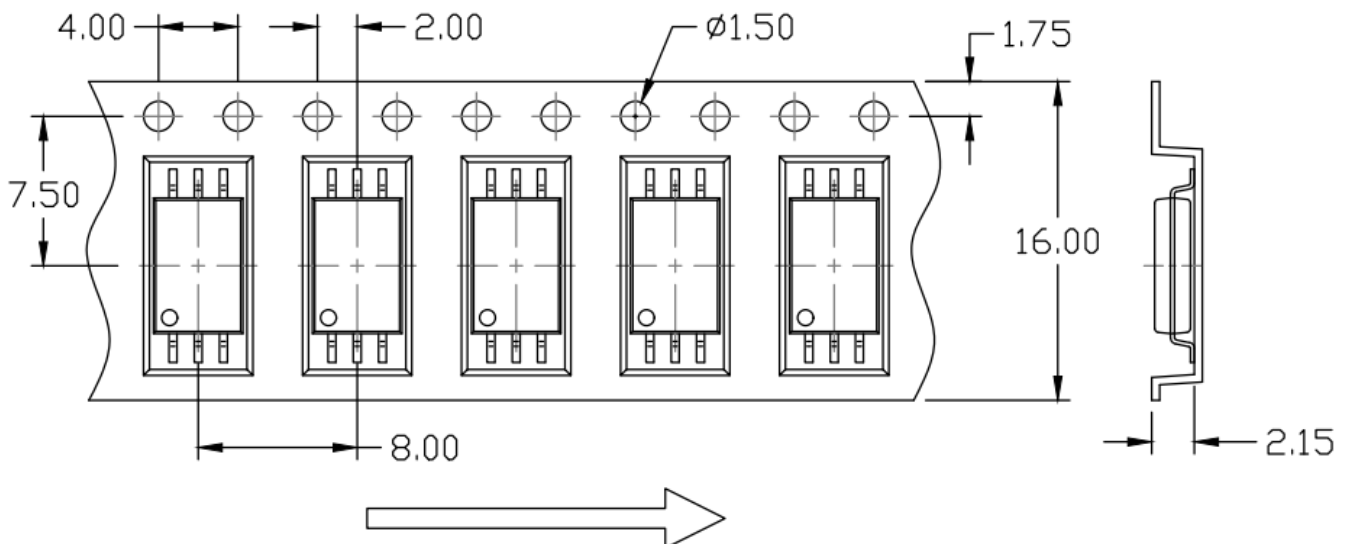




CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Technical drawing of a rectangular plate with dimensions and a side view. The main view shows a plate with a width of 24.00 and a height of 11.50. There are 10 holes along the top edge, with a diameter of $\varnothing 1.50$. The distance between the first and second hole is 4.00, and the distance between the last two holes is 2.00. The distance from the left edge to the first hole is 8.00. The distance from the right edge to the last hole is 1.75. The plate has a wavy bottom edge. A side view on the right shows the plate's profile with a thickness of 2.15. A large arrow points to the right, indicating the direction of assembly or flow.


Technical drawing of a rectangular plate with dimensions and a cross-section. The main view shows a plate with a width of 24.00 and a height of 11.50. There are 10 holes along the top edge, with a diameter of $\varnothing 1.50$. The distance between the first and second hole is 4.00, and the distance between the eighth and ninth hole is 2.00. The distance from the left edge to the first hole is 8.00. The cross-section view on the right shows a plate with a thickness of 2.15 and a height of 17.75. A large arrow points to the right, indicating the direction of the force or movement.

REEL SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (P Type)

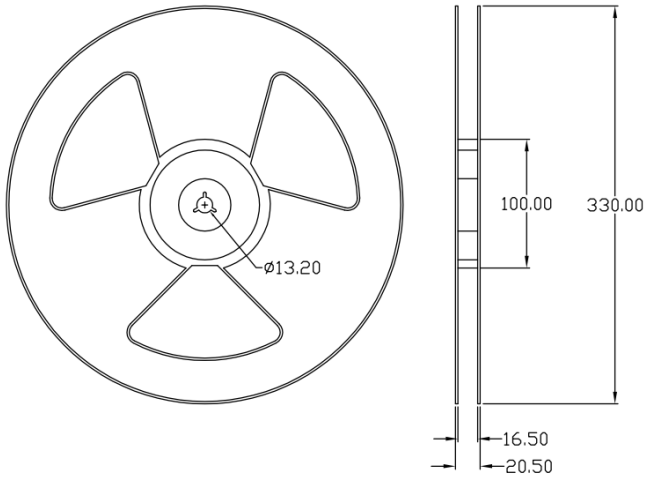


Surface Mount (Gullwing) Lead Forming (W Type)

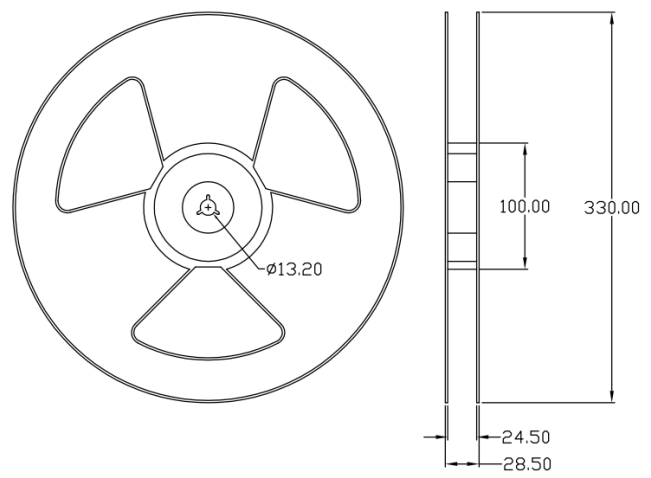


BOX SPECIFICATIONS (Reel Type)

INNER BOX

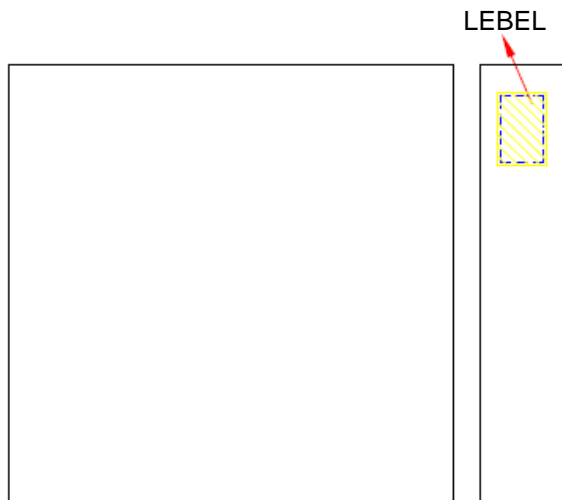

L x W x H = 36cm x 36cm x 6.9cm

OUTER BOX

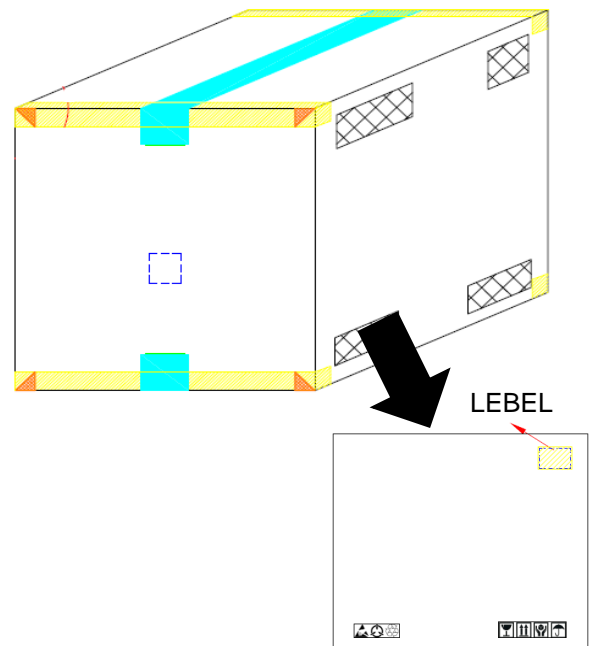

L x W x H = 45cm x 38cm x 38cm



MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

ORDERING AND MARKING INFORMATION

MARKING INFORMATION



M : Company Abbr.
YY : Year date code
WW : 2-digit work week
314 : Part Number
T or H : Factory identification mark
V : VDE Identification(Optional)

ORDERING INFORMATION

MPCS-314(P/W)-ZV

MPC – Company Abbr.
S – Stack
314 – Part Number
P/W – Lead Form Option
(P-9mm Clearance or W-11mm Clearance)
Z – Tape and Reel Option (T1/T2)
V –VDE Option (V or None)

LABEL INFORMATION



喆光照明光電股份有限公司
WISELITE Optronics Co., Ltd

Part No : XXXXXXXXXXXX Bin Code : X



Lot No : XXXXXXXXXXXX

Date Code : XXXX

Q'ty : XXXX pcs




PACKING QUANTITY

Option	Quantity	Quantity – Inner box	Quantity – Outer box
Option P T1/T2	3000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 45k Units
Option W T1/T2	3000 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box = 30k Units



REFLOW INFORMATION

REFLOW PROFILE

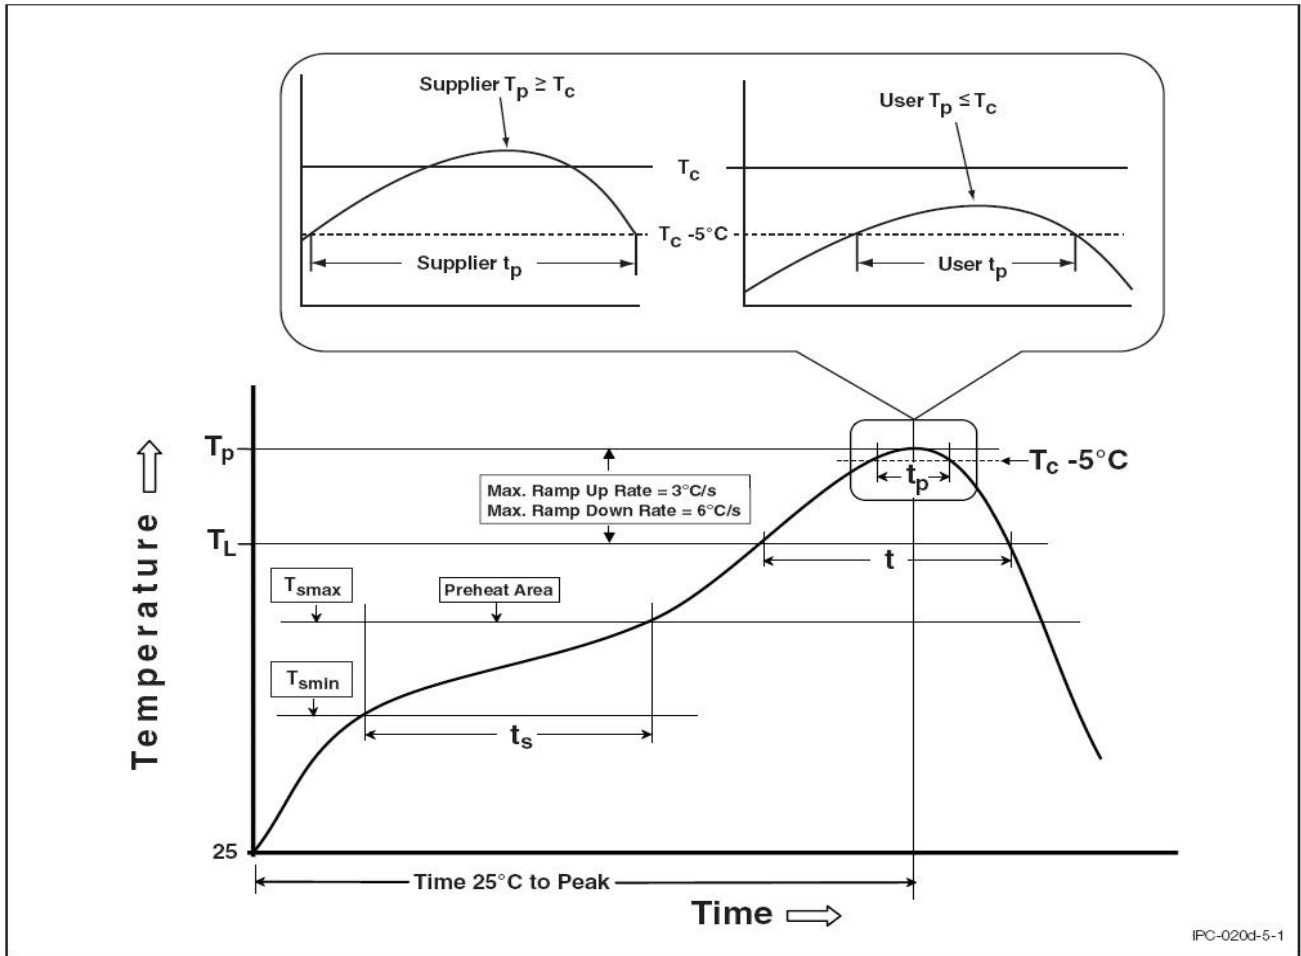

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	100°C	150°C
Temperature Max. (T _{smax})	150°C	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds	60-120 seconds
Ramp-up Rate (t _L to t _P)	3°C/second max.	3°C/second max.
Liquidous Temperature (T _L)	183°C	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (t _P) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.




MPCS-314 Series

LSOP6, DC Input, 1.0A Gate Driver Optocoupler

TEMPERATURE PROFILE OF SOLDERING

WAVE SOLDERING (JESD22-A111 COMPLIANT)

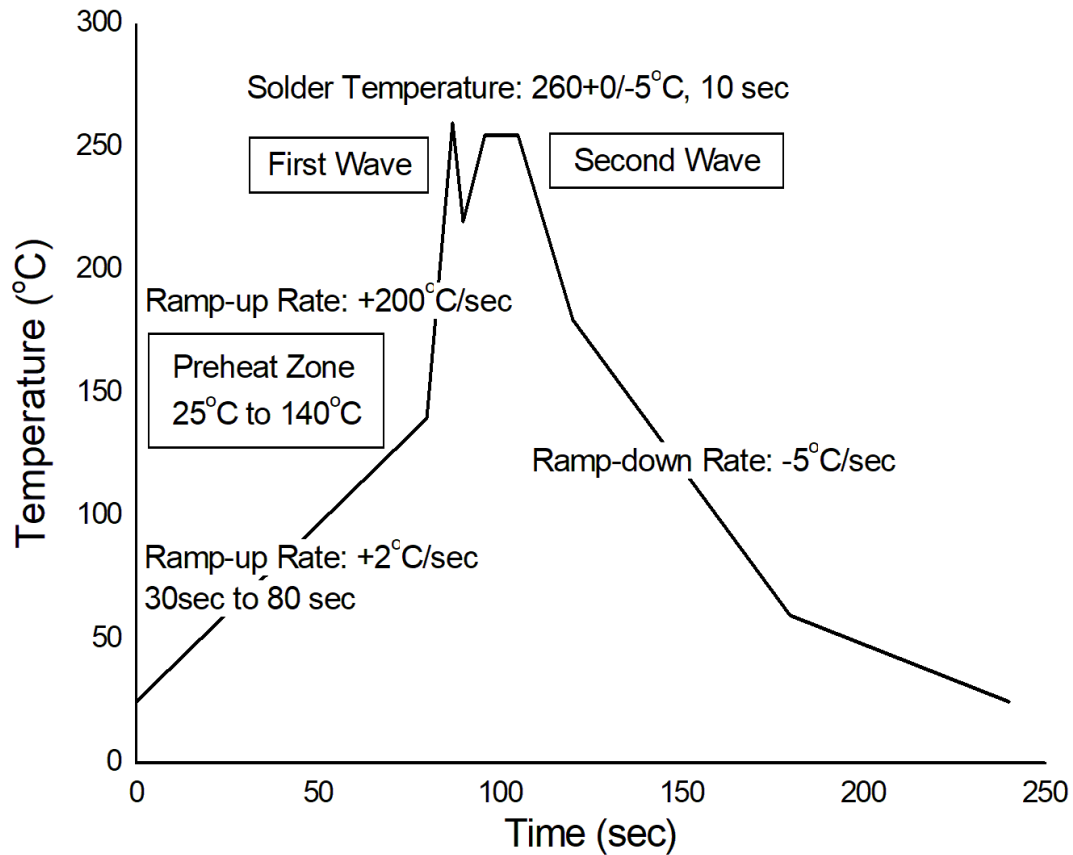

HAND SOLDERING BY SOLDERING IRON

Soldering Temperature	$380 \pm 5^\circ\text{C}$
Soldering Time	3 sec max.
One time soldering is recommended for all soldering method.	
Do not solder more than three times for IR reflow soldering.	



DISCLAIMER

- WISELITE is continually improving the quality, reliability, function and design. WISELITE reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- WISELITE makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, WISELITE disclaims (a) any and all liability arising out of the application or use of any product, (b) any and all liability, including without limitation special, consequential or incidental damages, and (c) any and all implied warranties, including warranties of fitness for particular.
- The products shown in this publication are designed for the general use in electronic applications such as office automation, equipment, communications devices, audio/visual equipment, electrical application and instrumentation purpose, non-infringement and merchantability.
- This product is not intended to be used for military, aircraft, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Please contact WISELITE sales agent for special application request.
- Immerge unit's body in solder paste is not recommended.
- Parameters provided in datasheets may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated in each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify WISELITE's terms and conditions of purchase, including but not limited to the warranty expressed therein.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.