



MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

Description

The MPC303X, MPC304X and MPC306X series combine an AlGaAs infrared emitting diode as the emitter which is optically coupled to a monolithic silicon random-phase photo triac in a plastic DIP6 package with different lead forming options.


Features

- High isolation 5000 VRMS
- DC input with zero-cross photo triac output
- Operating temperature range - 40 °C to 100 °C
- REACH & RoHS compliance
- MSL class 1
- Regulatory Approvals
 - UL - UL1577
 - VDE - EN60747-5-5(VDE0884-5)
 - CQC – GB4943.1, GB8898

Applications

- Solenoid/valve controls
- Lighting controls
- Motor controls
- Temperature controls
- Static AC power switches
- Solid state relays
- Interfacing microprocessors to 115 to 240VAC peripherals


SCHEMATIC

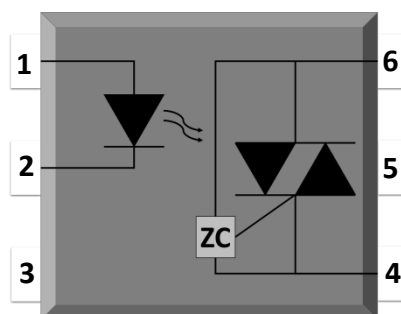

PIN DEFINITION

- | | |
|------------|--------------|
| 1. Anode | 4. Terminal |
| 2. Cathode | 5. Substrate |
| 3. NC | 6. Terminal |

PACKAGE OUTLINE

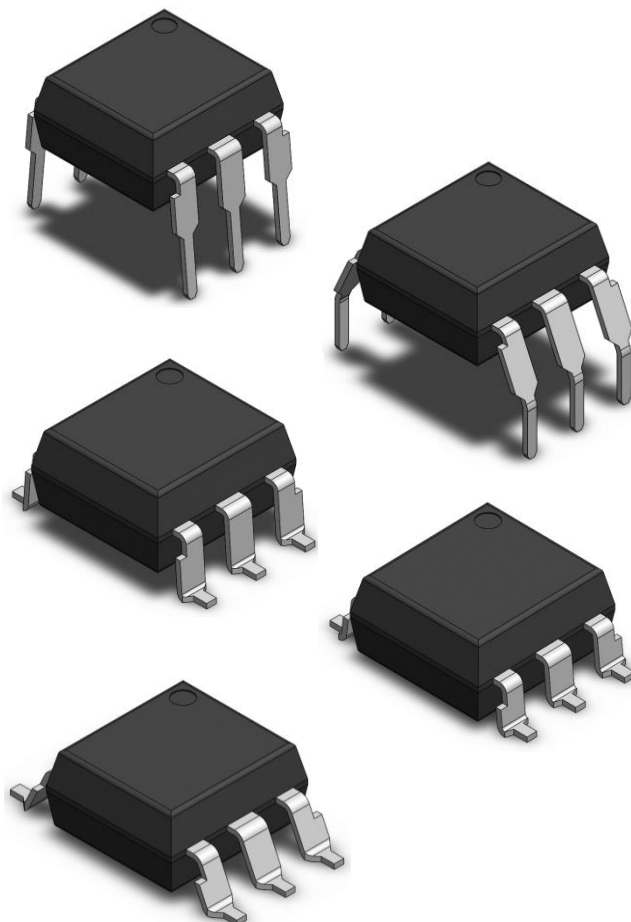



MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	VALUE	UNIT	NOTE
INPUT					
Forward Current		I_F	60	mA	
Reverse Voltage		V_R	6	V	
Junction Temperature		T_j	125	°C	
Input Power Dissipation		P_I	100	mW	
OUTPUT					
Off-state Output Terminal Voltage	MPC303X	V_{DRM}	250	V	
	MPC304X		400		
	MPC306X		600		
Peak Repetitive Surge Current PW=100 μ s, 120pps		I_{TSM}	1	A	
Junction Temperature		T_j	125	°C	
Output Power Dissipation		P_O	300	mW	
COMMON					
Total Power Dissipation		P_{tot}	400	mW	
Isolation Voltage		V_{iso}	5000	V _{rms}	1
Operating Temperature		T_{opr}	-40~100	°C	
Storage Temperature		T_{stg}	-55~125	°C	
Soldering Temperature		T_{sol}	260	°C	2

Note 1. AC For 1 Minute, R.H. = 40 ~ 60%

Note 2. For 10 seconds



MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

ELECTRICAL OPTICAL CHARACTERISTICS at Ta=25°C

PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT								
Forward Voltage		V_F	-	1.24	1.4	V	$I_F=10\text{mA}$	
Reverse Current		I_R	-	-	10	μA	$V_R=6\text{V}$	
Input Capacitance		C_{in}	-	8.5	250	pF	$V=0, f=1\text{kHz}$	
OUTPUT								
Peak Off-state Current, Either Direction		I_{DRM}	-	-	100	nA	$V_{DRM}=\text{Rated } V_{DRM}$ $I_F=0$	3
Peak On-state Current, Either Direction		V_{TM}	-	1.59	2.5	V	$I_{TM}=100\text{mA}$	
Critical Rate of Rise of Off-state Voltage		dV/dt	1000	-	-	V/ μs	$V_{PEAK}=\text{Rated } V_{DRM}$	4
TRANSFER CHARACTERISTICS								
LED Trigger Current	MPC3031, MPC3041, MPC3061	I_{FT}	-	-	15	mA	Terminal Voltage = 3V $I_{TM}=100\text{mA}$	
	MPC3032, MPC3042, MPC3062		-	-	10			
	MPC3033, MPC3043, MPC3063		-	-	5			
Holding Current		I_H	-	237	-	μA		
Isolation Resistance		Riso	10^4 2	10^4 4	-	Ω	DC500V, 40 ~ 60% R.H.	
Floating Capacitance		C_{IO}	-	0.4	-	pF	$V=0, f=1\text{MHz}$	

Note3. Test voltage must be applied within dV/dt rating.

Note4. Refer to Fig.15 & Fig.16



MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

CHARACTERISTIC CURVES

Fig.1 Forward Current vs. Ambient Temperature

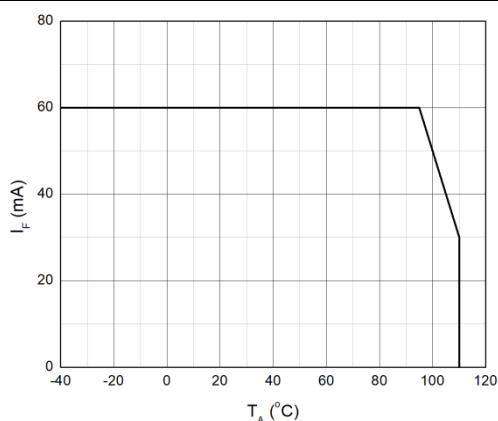


Fig.2 On-state Terminal Current vs. Ambient Temperature

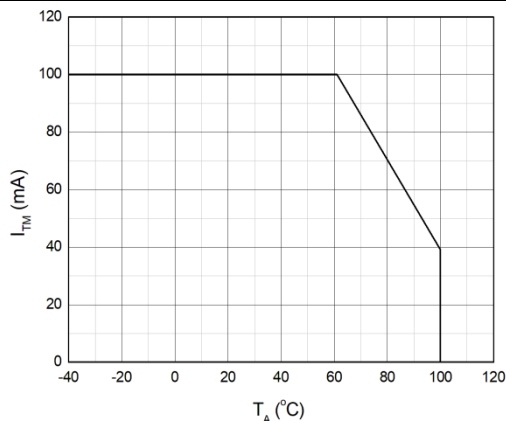


Fig.3 Forward Current vs. Forward Voltage

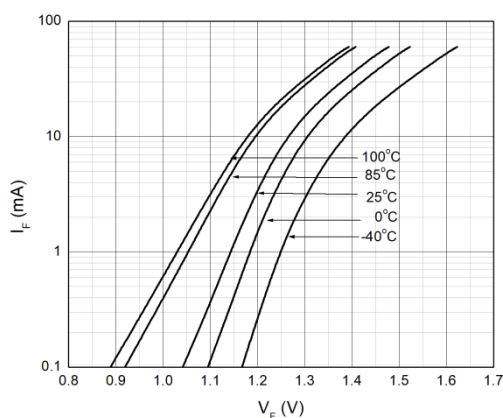


Fig.4 Off-state Terminal Current vs. Ambient Temperature

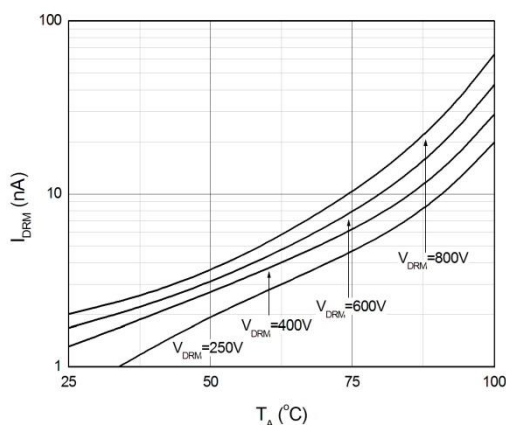


Fig.5 Normalized Off-state Terminal Voltage vs. Ambient Temperature


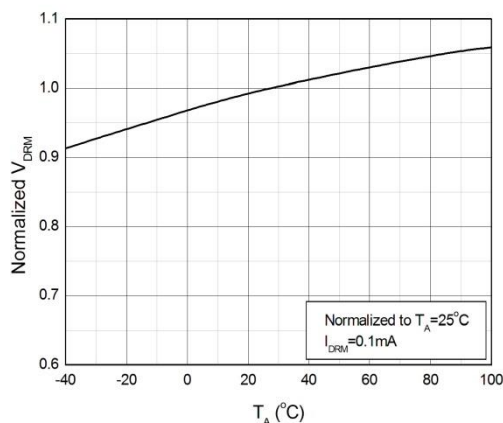


Fig.6 Normalized Trigger Current vs. LED Trigger Pulse Width



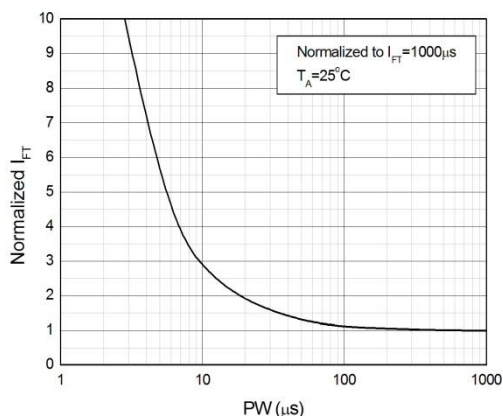

MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

CHARACTERISTIC CURVES

Fig.7 Normalized Trigger Current vs. Ambient Temperature

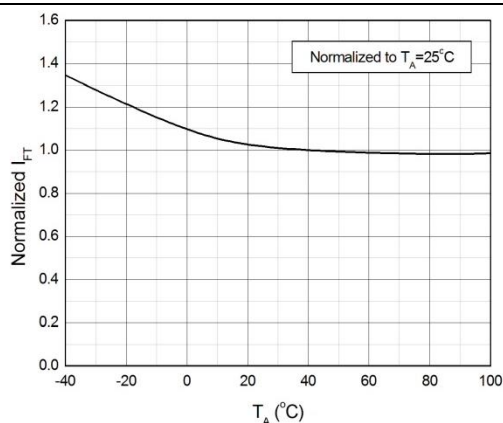


Fig.8 On-state Terminal Voltage vs. Ambient Temperature

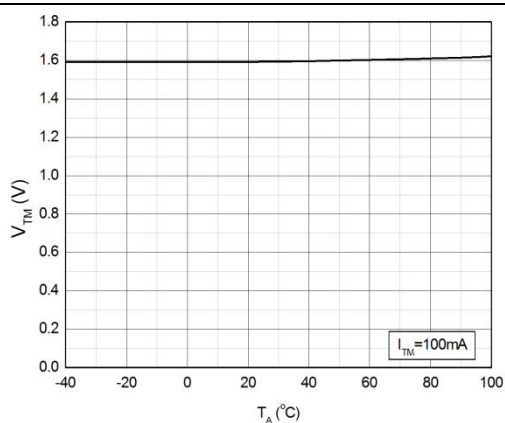


Fig.9 On-state Terminal Voltage vs. On-state Terminal Current

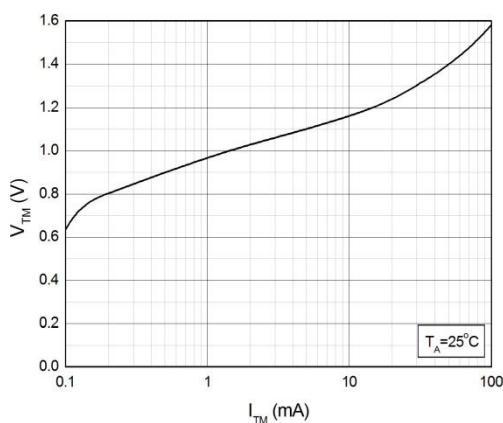


Fig.10 Holding Current vs. Ambient Temperature

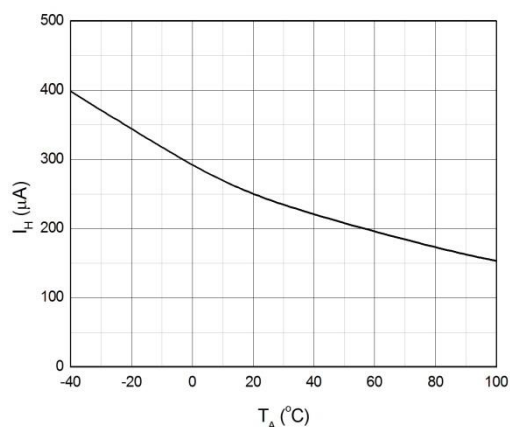


Fig.11 Normalized Inhibit Voltage vs. Ambient Temperature


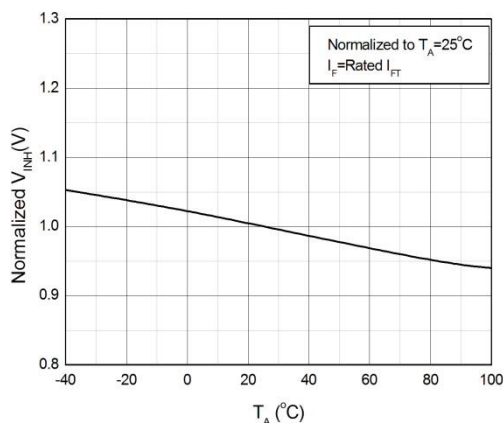


Fig.12 Normalized Leakage in Inhibit State vs. Ambient Temperature



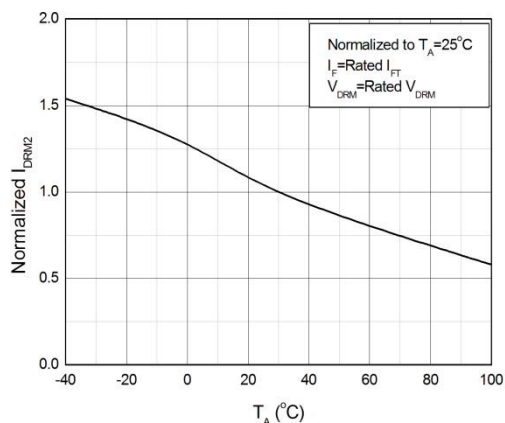

MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

CHARACTERISTIC CURVES

Fig.13 Turn On Time vs. Forward Current


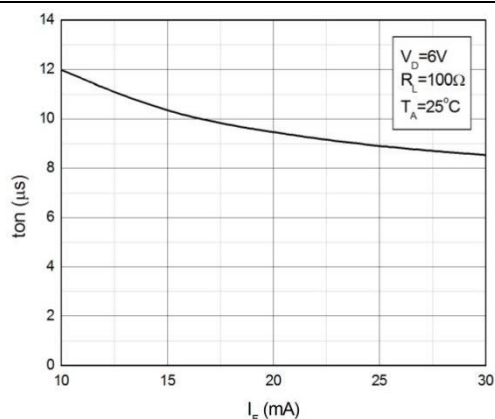


Fig.14 Turn On Time vs. Ambient Temperature

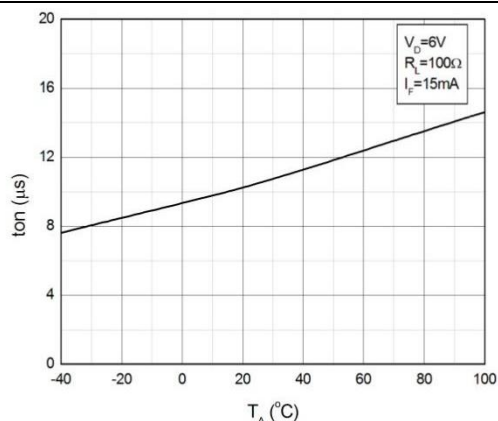

TEST CIRCUITS

Fig.15 Test Circuits of Turn On Time

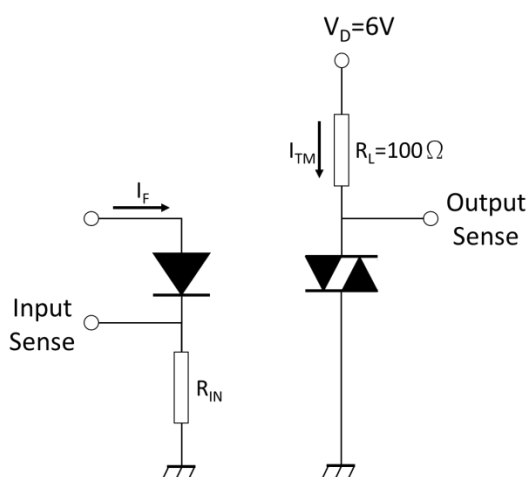


Fig.16 Waveforms of Turn On Time

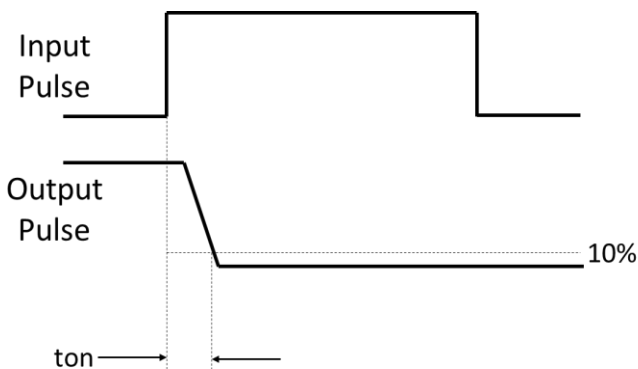


Fig.17 Test Circuits of dV/dt


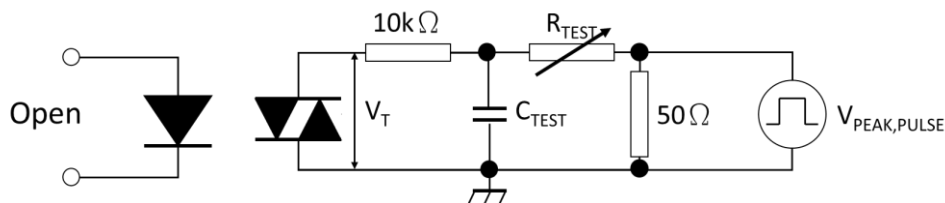


Fig.18 Waveforms of dV/dt



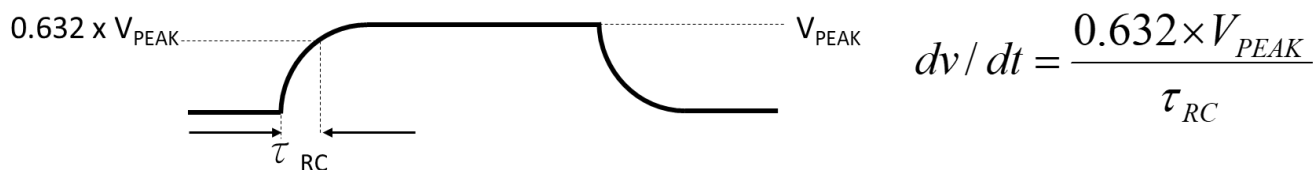


MPC303X, MPC304X, MPC306X Series


DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

Standard DIP – Through Hole (DIP Type)

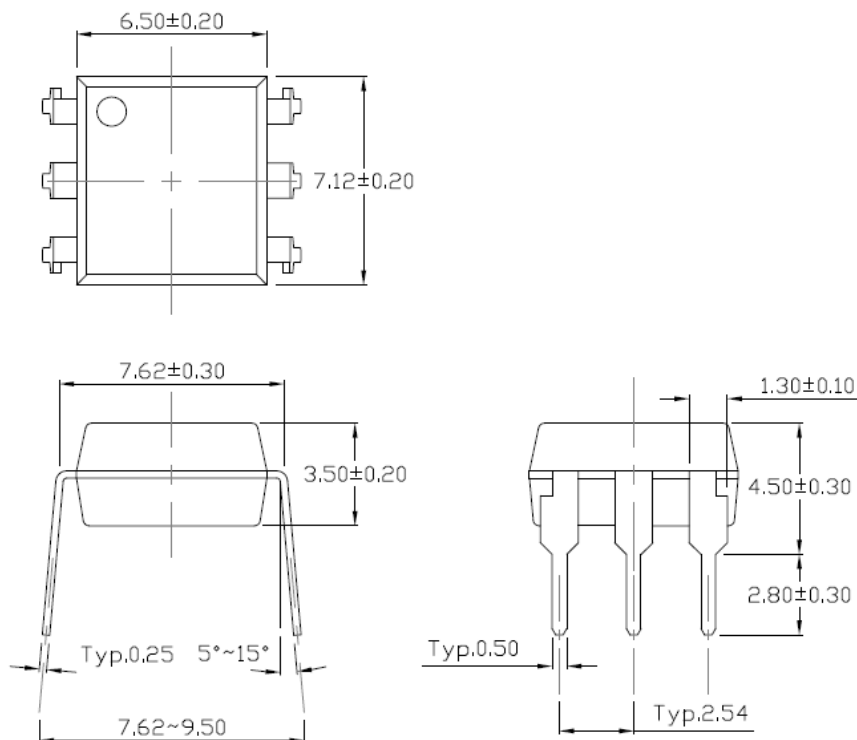

Gullwing (400mil) Lead Forming – Through Hole (M Type)

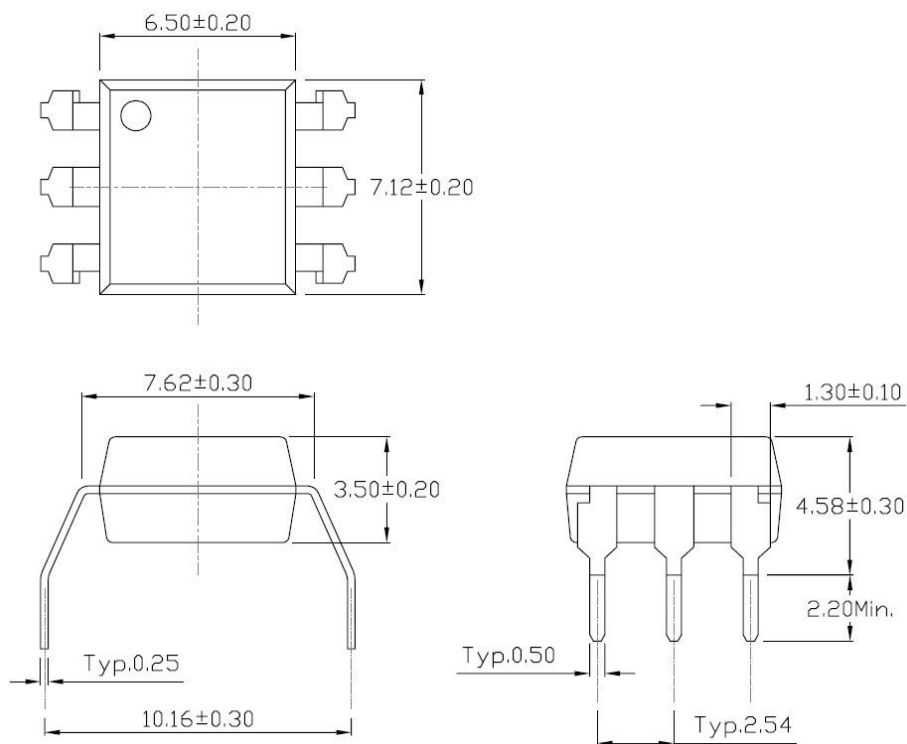




MPC303X, MPC304X, MPC306X Series


DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming (S Type)

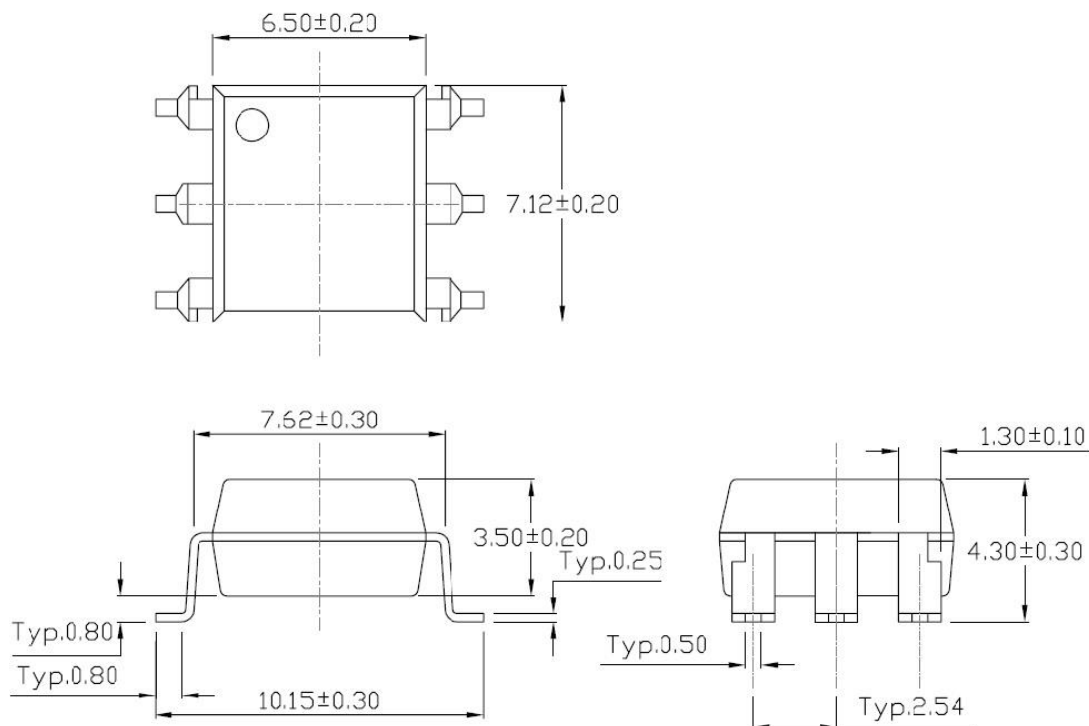

Surface Mount (Low Profile) Lead Forming (SL Type)

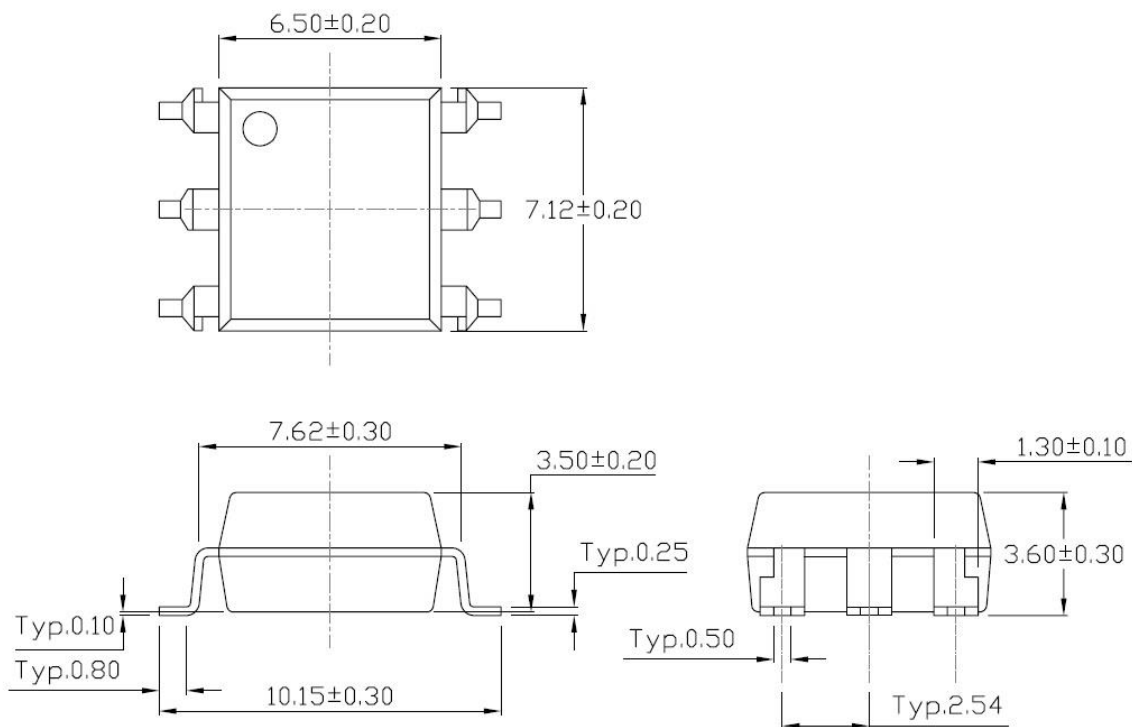




MPC303X, MPC304X, MPC306X Series


DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

Surface Mount Lead Forming & Surface Mount (Low Profile) Lead Forming

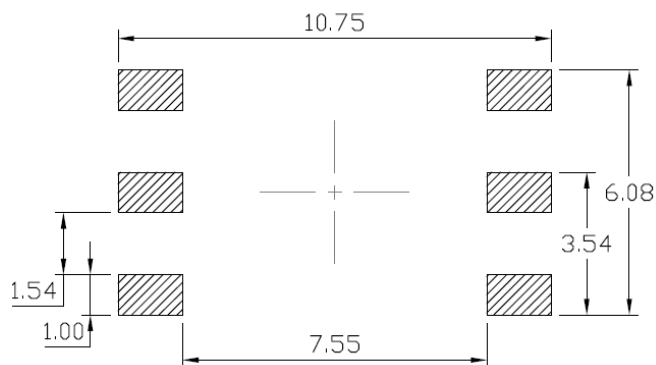

Surface Mount (Gullwing) Lead Forming

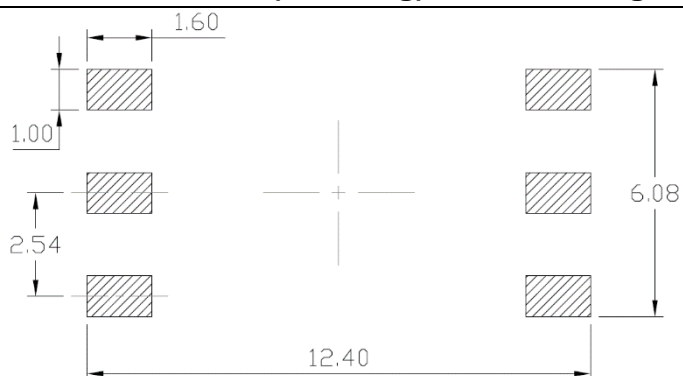






MPC303X, MPC304X, MPC306X Series




DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Standard DIP

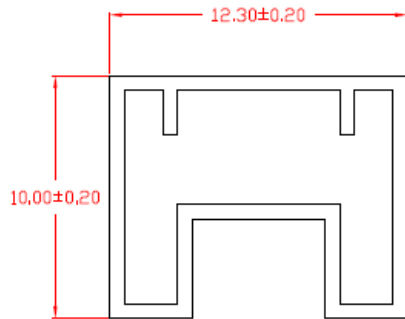

Option M

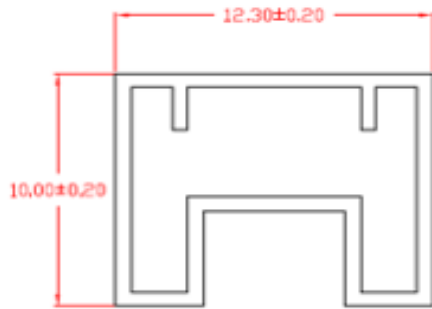




MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

BOX SPECIFICATIONS (Tube Type)


Inner Box

Label



- L x W x H = 52.5cm x 10.7cm x 4.7cm

Outer Box

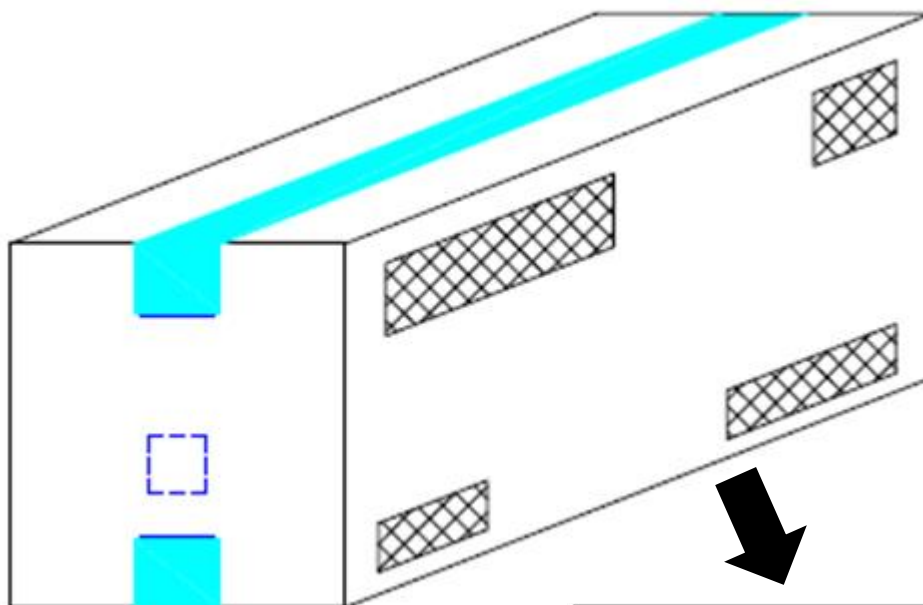

- L x W x H = 53.5cm x 23.5cm x 25.5cm






MPC303X, MPC304X, MPC306X Series


DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option S(T1) & SL(T1)

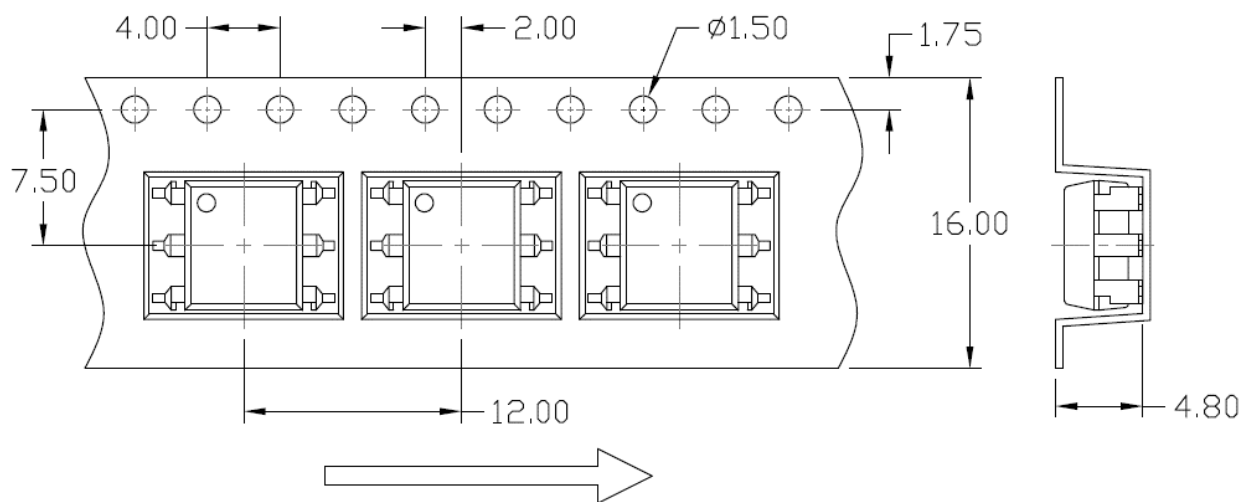

Option S(T2) & SL(T2)

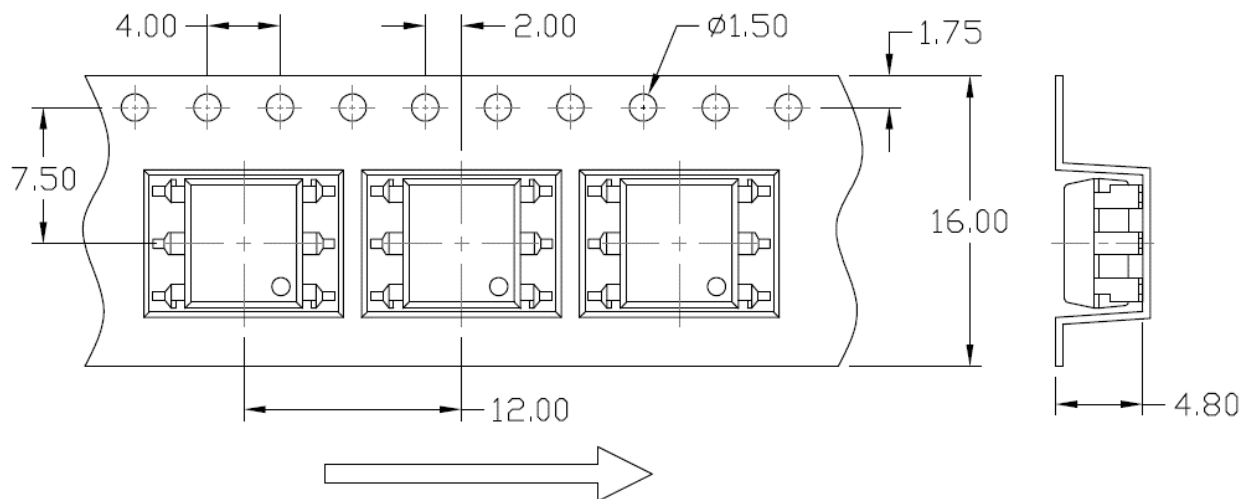




MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

REEL SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option S & Option SL

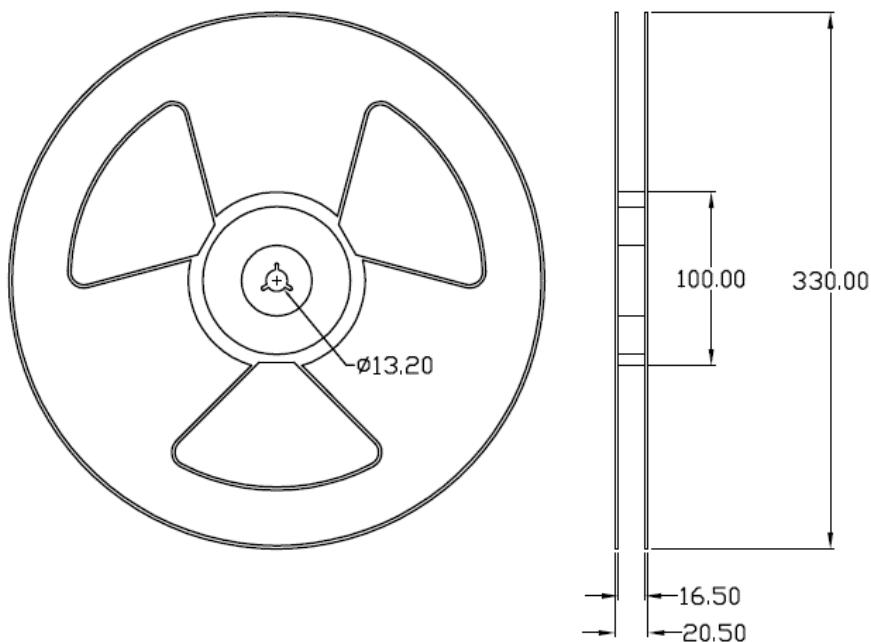



MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler


BOX SPECIFICATIONS (Reel Type)

Inner Box




- L x W x H = 36cm x 36cm x 6.9cm

Outer Box

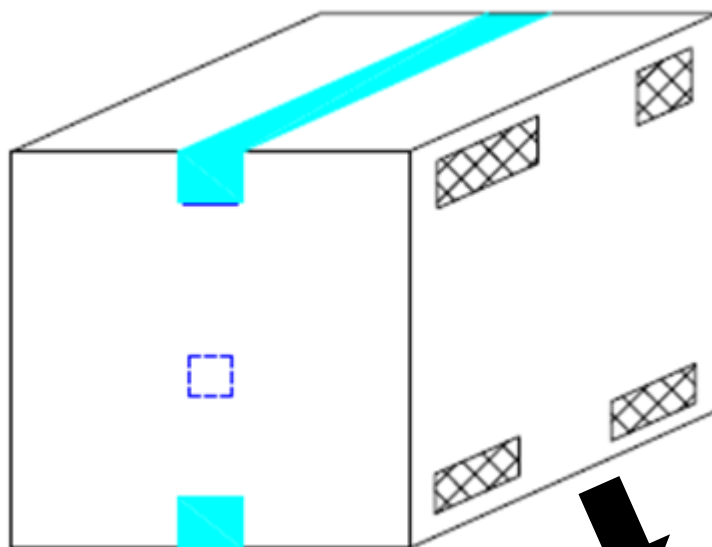

- L x W x H = 45cm x 38cm x 38cm






MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

ORDERING AND MARKING INFORMATION

MARKING INFORMATION

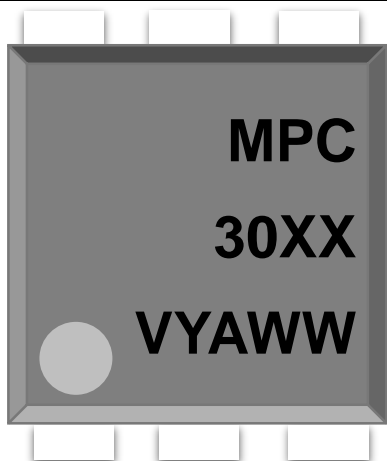

MPC : Company Abbr.
30XX : Part Number & Rank
V : VDE Option
Y : Fiscal Year
A : Manufacturing Code
WW : Work Week

ORDERING INFORMATION

MPC30XX(Y)(Z)-GV

MPC – Company Abbr.
30XX – Part Number
(31/32/33/41/42/43/61/62/63)
Y – Lead Form Option (M/S/SL/None)
Z – Tape and Reel Option (T1/T2)
G – Green Option (G or None)
V – VDE Option (V or None)

LABEL INFORMATION



喆光照明光電股份有限公司
WISELITE Optronics Co., Ltd

Part No : XXXXXXXXXXXXX

Bin Code : X



Lot No : XXXXXXXXXXXX

Date Code : XXXX

Q'ty : XXXX pcs



Packing Quantity

Option	Quantity	Quantity – Inner box	Quantity – Outer box
None	50 Units/Tube	32 Tubes/Inner box	10 Inner box/Outer box = 16k Units
M	50 Units/Tube	28 Tubes/Inner box	10 Inner box/Outer box = 14k Units
S(T1)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 15k Units
S(T2)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 15k Units
SL(T1)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 15k Units
SL(T2)	1000 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 15k Units




MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

REFLOW INFORMATION

REFLOW PROFILE

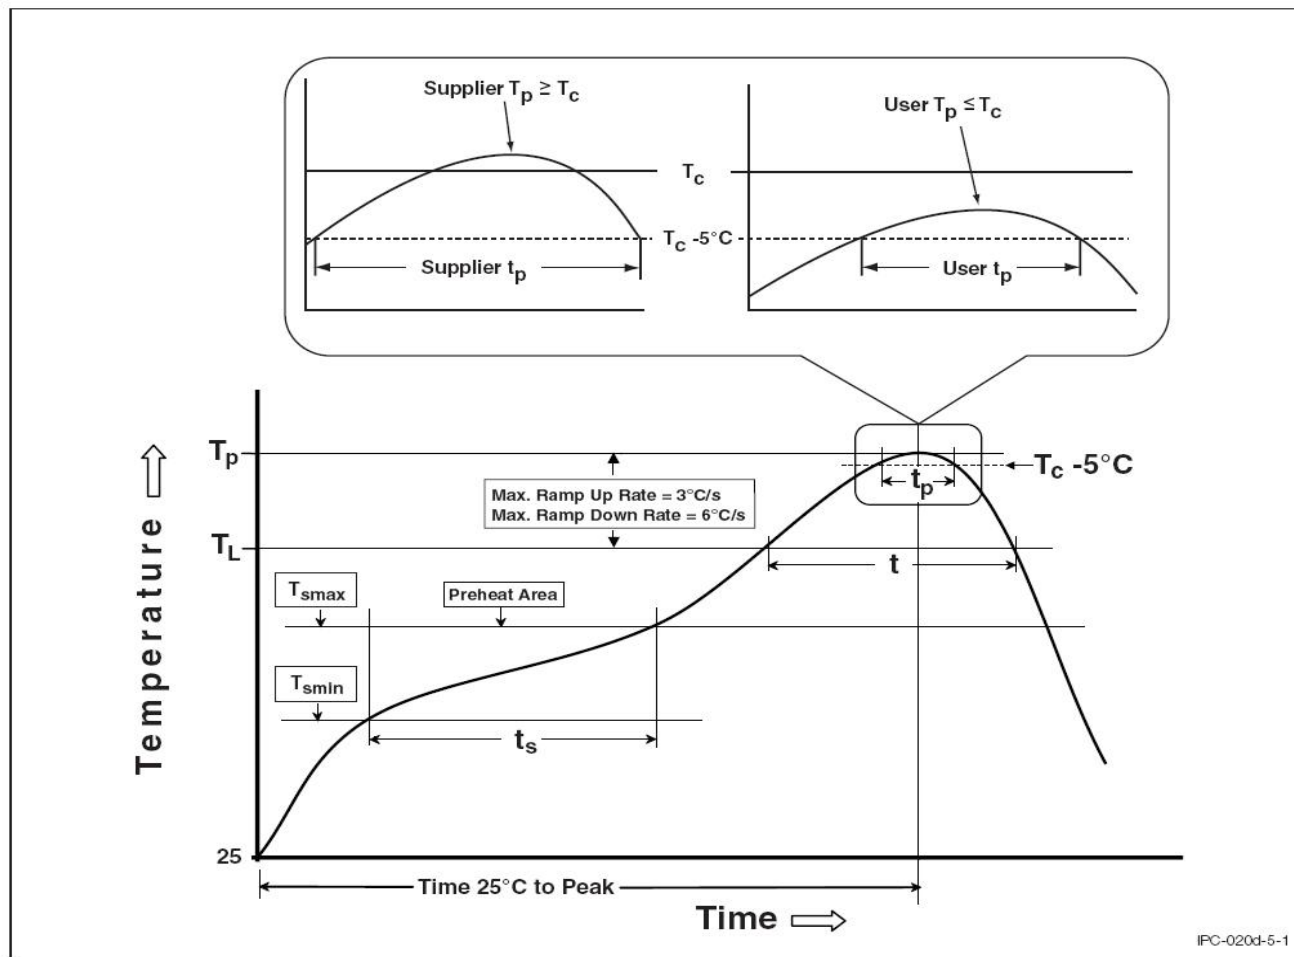

IPC-020d-5-1

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T _{smin})	100	150°C
Temperature Max. (T _{smax})	150	200°C
Time (t _s) from (T _{smin} to T _{smax})	60-120 seconds	60-120 seconds
Ramp-up Rate (t _L to t _P)	3°C/second max.	3°C/second max.
Liquidous Temperature (T _L)	183°C	217°C
Time (t _L) Maintained Above (T _L)	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (t _P) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (T _P to T _L)	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.



MPC303X, MPC304X, MPC306X Series

DIP6, DC Input, Zero-Cross Photo TRIAC Coupler

DISCLAIMER

- WISELITE is continually improving the quality, reliability, function and design. WISELITE reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- WISELITE makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, WISELITE disclaims (a) any and all liability arising out of the application or use of any product, (b) any and all liability, including without limitation special, consequential or incidental damages, and (c) any and all implied warranties, including warranties of fitness for particular
- The products shown in this publication are designed for the general use in electronic applications such as office automation, equipment, communications devices, audio/visual equipment, electrical application and instrumentation purpose, non-infringement and merchantability.
- This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Please contact WISELITE sales agent for special application request.
- Immerge unit's body in solder paste is not recommended.
- Parameters provided in datasheets may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated in each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify WISELITE's terms and conditions of purchase, including but not limited to the warranty expressed therein.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.